



"STRONG"



► Top-grade industrial quality for the hardest of continuous use

306 G

RING SLOGGING SPANNER DEEP OFFSET

- For very heavy-duty work
- To use with club hammer or pneumatic hammer for tightening or loosening
- Hot forged, sandblasted

  mm

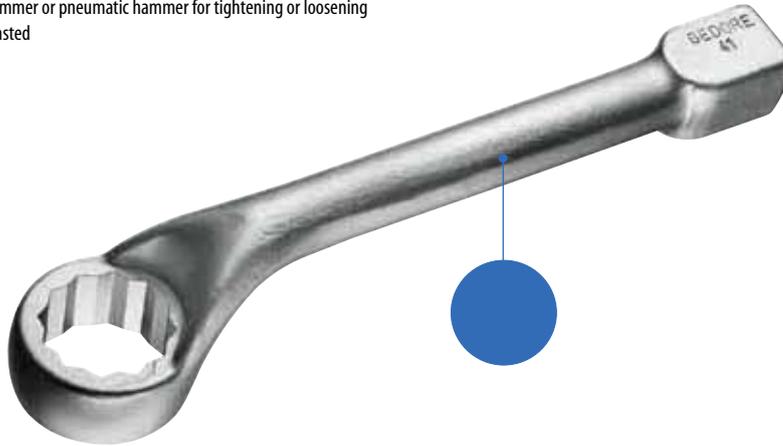

 mm

27 – 110

mm	L	a	b		Code	No.	mm	L	a	b		Code	No.
27	270	25	51	1.098	1415875	306 G 27	65	380	45	108	5.490	1416332	306 G 65
30	270	25	51	1.080	1415913	306 G 30	70	406	50	126	7.455	1416405	306 G 70
32	270	25	51	1.061	1415972	306 G 32	75	406	50	126	7.165	1416456	306 G 75
36	310	30	67	2.010	1416014	306 G 36	80	406	50	126	6.970	1416480	306 G 80
41	310	30	67	1.842	1416057	306 G 41	85	459	57	151	10.630	1416537	306 G 85
46	340	35	79	2.950	1416111	306 G 46	90	459	57	151	10.480	1416553	306 G 90
50	360	40	94	4.410	1416197	306 G 50	95	459	57	151	9.830	1416588	306 G 95
55	360	40	94	4.155	1416227	306 G 55	110	510	68	172	13.565	1416669	306 G 110
60	380	45	108	5.690	1416308	306 G 60							

DEEP RING SPANNERS

"STRONG"


► Top-grade industrial quality for the hardest of continuous use

308

DEEP RING SPANNER straight pattern

- Acc. to DIN 3111
- In heat-treated steel as per EN 10083, shotblast finish
- Further sizes available on request
- * not standardised

  mm



 mm

32 – 65

mm*	L	a	b		Code	No.	mm*	L	a	b		Code	No.	
32	265	19.0	49.0	0.358	6481750	308 32	50	400	28.0	77.0	1.230	6482130	308 50	
36	*	295	22.0	56.0	0.473	6481830	55	442	29.5	83.5	1.626	6482210	308 55	
41		330	25.0	63.5	0.717	6481910	60	475	30.0	89.5	1.792	6482480	308 60	
46		365	27.0	70.5	0.925	6482050	65	*	510	32.0	97.0	2.208	6482560	308 65



"STRONG"

- Top-grade industrial quality for the hardest of continuous use
- Optional accessories: No. 2 AR extension tube for extending the lever arm




2 A

SINGLE ENDED RING SPANNER offset

- Heavy-duty pattern for highest torques
- GEDORE vanadium steel 31CrV3, chrome-plated
- Special sizes available on request



mm



mm

24 – 95

mm	L	a	b	d	h	2 AR	kg	Code	No.
24	180	17.0	38.0	18.3	29.0	0	0.389	6033840	2 A 24
27	190	17.4	41.5	18.3	31.5	0	0.430	6033920	2 A 27
30	200	18.4	47.0	18.3	33.0	0	0.514	6034060	2 A 30
32	235	18.4	50.0	21.3	34.0	1	0.732	6034140	2 A 32
34	235	18.4	50.0	21.3	34.0	1	0.748	6030150	2 A 34
36	245	20.0	55.0	21.3	35.0	1	0.796	6034220	2 A 36
41	265	22.0	61.5	21.3	39.0	1	0.934	6034300	2 A 41
46	280	23.0	68.5	24.1	40.0	2	1.220	6034490	2 A 46
50	290	25.5	75.0	24.1	42.0	2	1.388	6034570	2 A 50

mm	L	a	b	d	h	2 AR	kg	Code	No.
55	300	28.0	80.0	24.1	45.0	2	1.492	6034650	2 A 55
60	345	30.5	89.0	29.1	49.0	3	2.283	6034730	2 A 60
65	355	33.0	97.0	29.1	53.0	3	2.535	6034810	2 A 65
70	365	35.5	104.0	29.1	55.0	3	2.736	6035030	2 A 70
75	375	38.0	109.0	29.1	57.5	3	2.982	6035110	2 A 75
80	385	40.5	124.0	29.1	59.0	3	3.770	6035380	2 A 80
85	385	40.5	124.0	29.1	59.0	3	3.605	6035460	2 A 85
90	410	45.0	140.0	29.1	63.0	3	4.850	6035540	2 A 90
95	410	45.0	140.0	29.1	63.0	3	4.540	6035620	2 A 95

2 ATM

SINGLE ENDED RING SPANNER SET 19 pieces

- 15 spanners 2 A and 4 extension tubes on a sheet steel board fitted with hooks
- Dimensions: W 970 x H 740 mm



Contents
 2 A 24 27 30 32 36 41 46 50 55 60 65 70 75 80 85 2 AR 0 1 2 3

kg 65.0 Code 6049250 No. 2 ATM

2 AR

EXTENSION TUBE

- For ring spanner No. 2 A, steel tube, chrome-plated
- For extending the lever arm and applying higher forces



Internal-Ø	mm	mm	kg	Code	No.
19	24-30	460	0.614	6048600	2 AR 0
22	32-41	610	1.568	6048790	2 AR 1
25	46-55	760	2.806	6048870	2 AR 2
30	60-95	860	3.715	6048950	2 AR 3

