



ITX 34

SWIVEL HEAD WRENCH DOUBLE ENDED

for recessed **TORX®** head screws

- ▶ Shaft with holes for tommy bars 26 D and 26 RS (please order separately)
- ▶ Swivel through a wide radius
- ▶ Sockets in GEDORE chrome-molybdenum steel 42CrMo4, phosphated, shaft chrome-plated
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




| mm | M | mm | mm | mm | 26 D | 26 RS | Code | No. |
|---------|-----------|---------------|-----|----|------|-------|----------------|----------------|
| T15xT20 | M3,5 - M5 | 3,27 x 3,86 | 205 | 6 | 1 | 0.093 | 6290060 | ITX 34 T15xT20 |
| T25xT27 | M4,5 - M6 | 4,43 x 4,99 | 208 | 6 | 1 | 0.092 | 6290140 | ITX 34 T25xT27 |
| T30xT40 | M6 - M8 | 5,52 x 6,65 | 210 | 6 | 1 | 0.099 | 6290220 | ITX 34 T30xT40 |
| T45xT50 | M8 - M10 | 7,82 x 8,83 | 244 | 8 | 2 | 0.185 | 6290300 | ITX 34 T45xT50 |
| T55xT60 | M12 - M14 | 11,22 x 13,25 | 280 | 10 | 2 | 0.304 | 6290490 | ITX 34 T55xT60 |

IN 34 (MM)

SWIVEL HEAD WRENCH DOUBLE ENDED

for in-hex screws

- ▶ Shaft with holes for tommy bars 26 D and 26 RS (please order separately)
- ▶ Swivel through a wide radius
- ▶ Sockets in GEDORE chrome-molybdenum steel 42CrMo4, phosphated, shaft chrome-plated




| mm | L | t ₁ | t ₂ | 26 D | 26 RS | Code | No. |
|---------|-----|----------------|----------------|------|-------|-------|----------------|
| 3 x 4 | 198 | 4.0 | 5 | 6 | 1 | 0.101 | 6302250 |
| 5 x 6 | 202 | 5.0 | 6 | 6 | 1 | 0.107 | 6302330 |
| 8 x 10 | 235 | 8.0 | 10 | 8 | 2 | 0.199 | 6302410 |
| 12 x 14 | 270 | 10.0 | 12 | 10 | 2 | 0.336 | 6302680 |
| 17 x 19 | 295 | 14.0 | 16 | 12 | 3 | 0.411 | 6302760 |

IN 34 (AF)

SWIVEL HEAD WRENCH DOUBLE ENDED

for in-hex screws

- ▶ Shaft with holes for tommy bars 26 D and 26 RS (please order separately)
- ▶ Swivel through a wide radius
- ▶ Sockets in GEDORE chrome-molybdenum steel 42CrMo4, phosphated, shaft chrome-plated




| AF | L | t ₁ | t ₂ | 26 D | 26 RS | Code | No. |
|------------|-----|----------------|----------------|------|-------|-------|----------------|
| 3/8 x 1/2 | 270 | 10.0 | 12 | 10 | 2 | 0.310 | 6303140 |
| 9/16 x 5/8 | 295 | 14.0 | 16 | 12 | 3 | 0.402 | 6303220 |

SOCKET WRENCHES

25

SOCKET WRENCH offset

- ▶ Solid pattern with extra deep socket for protruding bolts
- ▶ With dome for pointed screw heads
- ▶ Sizes 55 - 70 without dome (dimension a₂)
- ▶ GEDORE vanadium steel 31CrV3, chrome-plated



mm


10 - 70

| mm | L | a ₁ | a ₂ | d ₁ | d ₂ | h | Code | No. |
|----|-----|----------------|----------------|----------------|----------------|-----|-------|----------------|
| 10 | 160 | 9.6 | 16.5 | 15.0 | 10 | 32 | 0.120 | 6188290 |
| 13 | 200 | 12.7 | 23.0 | 19.0 | 12 | 41 | 0.220 | 6188530 |
| 14 | 215 | 13.7 | 24.0 | 20.5 | 12 | 44 | 0.247 | 6188610 |
| 16 | 240 | 11.0 | 25.5 | 23.5 | 14 | 49 | 0.346 | 6196200 |
| 17 | 250 | 12.0 | 26.0 | 25.0 | 14 | 49 | 0.373 | 6188880 |
| 18 | 265 | 13.5 | 27.5 | 26.0 | 16 | 56 | 0.487 | 6196470 |
| 19 | 280 | 15.4 | 29.0 | 27.5 | 16 | 56 | 0.539 | 6188960 |
| 21 | 305 | 15.5 | 32.5 | 30.5 | 18 | 64 | 0.722 | 6196550 |
| 22 | 315 | 16.4 | 32.5 | 32.0 | 18 | 64 | 0.797 | 6189180 |
| 24 | 345 | 19.5 | 37.1 | 34.5 | 20 | 71 | 1.055 | 6189260 |
| 27 | 380 | 21.4 | 37.5 | 38.5 | 20 | 74 | 1.179 | 6189340 |
| 30 | 420 | 22.3 | 41.3 | 42.0 | 22 | 84 | 1.536 | 6189420 |
| 32 | 450 | 26.5 | 43.2 | 45.0 | 22 | 87 | 0.633 | 6189500 |
| 36 | 500 | 27.3 | 47.1 | 50.0 | 26 | 97 | 2.523 | 6189690 |
| 41 | 560 | 30.3 | 49.7 | 56.0 | 26 | 106 | 2.940 | 6189770 |
| 46 | 630 | 33.4 | 56.5 | 62.0 | 28 | 114 | 3.785 | 6189850 |
| 50 | 630 | 35.9 | 61.5 | 67.0 | 32 | 128 | 4.900 | 6189930 |
| 55 | 670 | 38.0 | 74.0 | 74.0 | 34 | 120 | 5.685 | 6190000 |
| 60 | 670 | 40.0 | 81.0 | 81.0 | 34 | 125 | 5.770 | 6190190 |
| 65 | 750 | 42.8 | 88.0 | 88.0 | 40 | 130 | 8.930 | 6190270 |
| 70 | 750 | 46.0 | 94.0 | 94.0 | 40 | 135 | 9.200 | 6190350 |

25 V

SOCKET WRENCH offset

- ▶ Solid pattern with extra deep socket
- ▶ GEDORE vanadium steel 31CrV3, chrome-plated




mm

8 - 17

| mm | L | a | d ₁ | d ₂ | h | Code | No. |
|----|-----|------|----------------|----------------|------|-------|----------------|
| 8 | 150 | 11.0 | 15.0 | 10 | 32.0 | 0.116 | 6194770 |
| 9 | 160 | 11.0 | 16.5 | 10 | 35.0 | 0.126 | 6194850 |
| 10 | 175 | 12.0 | 19.0 | 12 | 37.5 | 0.203 | 6194930 |
| 12 | 215 | 14.5 | 22.0 | 14 | 44.0 | 0.335 | 6195150 |
| 13 | 230 | 20.5 | 23.5 | 14 | 47.0 | 0.357 | 6195230 |
| 14 | 240 | 21.5 | 25.0 | 14 | 49.0 | 0.378 | 6195310 |
| 17 | 280 | 26.5 | 30.0 | 18 | 62.0 | 0.718 | 6195580 |

**25 PK****DOUBLE ENDED SOCKET WRENCH offset with hole**

- Solid pattern with two hexagon heads
- Deep bores above the hexagon heads to take long studs
- Through-hole on the angled side to take a tommy bar (e.g. 26 D, please order separately)
- Chrome-plated

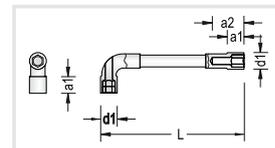


mm

6 – 36

| mm | L | a ₁ | a ₂ | d ₁ | 26 D | kg | Code | No. | mm | L | a ₁ | a ₂ | d ₁ | 26 D | kg | Code | No. |
|----|-----|----------------|----------------|----------------|------|-------|----------------|----------|----|-----|----------------|----------------|----------------|------|-------|----------------|----------|
| 6 | 105 | 9 | 26.5 | 13,0 | 5 | 0.080 | 1616323 | 25 PK 6 | 17 | 187 | 15 | 35.0 | 25,5 | 8 | 0.305 | 1436899 | 25 PK 17 |
| 7 | 107 | 9 | 26.5 | 14,0 | 5 | 0.081 | 1616331 | 25 PK 7 | 18 | 195 | 18 | 39.0 | 26,5 | 10 | 0.385 | 1436902 | 25 PK 18 |
| 8 | 112 | 10 | 26.5 | 14,0 | 5 | 0.091 | 1616358 | 25 PK 8 | 19 | 205 | 17 | 38.0 | 28,0 | 12 | 0.440 | 1436910 | 25 PK 19 |
| 9 | 120 | 10 | 26.5 | 14,0 | 5 | 0.099 | 1436805 | 25 PK 9 | 21 | 225 | 18 | 47.0 | 32,0 | 12 | 0.620 | 1436929 | 25 PK 21 |
| 10 | 130 | 10 | 23.0 | 15,5 | 6 | 0.116 | 1436813 | 25 PK 10 | 22 | 225 | 18 | 47.0 | 32,0 | 12 | 0.632 | 1436937 | 25 PK 22 |
| 11 | 136 | 10 | 23.0 | 16,5 | 6 | 0.122 | 1436821 | 25 PK 11 | 24 | 248 | 22 | 37.0 | 35,5 | 12 | 0.814 | 1436945 | 25 PK 24 |
| 12 | 145 | 10 | 37.0 | 18,5 | 6 | 0.166 | 1436848 | 25 PK 12 | 27 | 280 | 26 | 60.0 | 38,0 | 16 | 1.088 | 1436953 | 25 PK 27 |
| 13 | 152 | 11 | 35.0 | 20,0 | 8 | 0.192 | 1436856 | 25 PK 13 | 30 | 310 | 27 | 64.0 | 42,0 | 18 | 1.500 | 1436961 | 25 PK 30 |
| 14 | 160 | 12 | 38.0 | 21,0 | 8 | 0.216 | 1436864 | 25 PK 14 | 32 | 330 | 30 | 63.0 | 45,0 | 20 | 1.475 | 1436988 | 25 PK 32 |
| 15 | 170 | 13 | 38.0 | 22,5 | 8 | 0.239 | 1616366 | 25 PK 15 | 34 | 340 | 32 | 67.0 | 47,0 | 20 | 1.580 | 1436996 | 25 PK 34 |
| 16 | 178 | 15 | 34.0 | 24,0 | 8 | 0.275 | 1436872 | 25 PK 16 | 36 | 355 | 33 | 74.0 | 50,0 | 20 | 2.052 | 1437003 | 25 PK 36 |

25 PK-012**DOUBLE ENDED SOCKET WRENCH SET**

- Solid pattern with two hexagon heads
- Deep bores above the hexagon heads to take long studs
- Through-hole on the angled side to take a tommy bar
- Chrome-plated

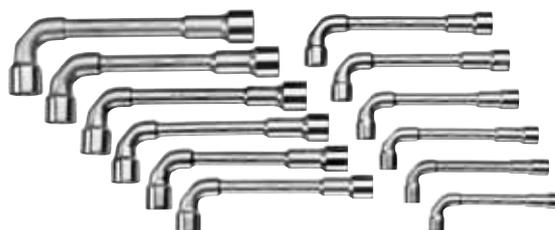

Contents

8 9 10 11 12 13 14 15 16 17 18 19

2.578

Code

1527312

No.

25 PK-012




"SOLID"

35 A - DS 35 A

SOCKET WRENCH solid, short pattern

- ▶ Solid pattern
- ▶ Acc. to DIN 3112, ISO 2236
- ▶ With extra deep hexagon heads and ball catch
- ▶ GEDORE vanadium steel 31CrV3, manganese-phosphated
- ▶ No. 35 A = Delivery without tommy bar
- ▶ No. DS 35 A = Delivery with tommy bar 35 D




| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | ⚖ kg | Code | No. |
|------|-----|------|----------------|----------------|----------------|------|-------|----------------|---------|
| 10 | 115 | 8.5 | 16,0 | 15 | 6.5 | 6 | 0.091 | 6304380 | 35 A 10 |
| 13 | 130 | 11.0 | 19,5 | 19 | 8.5 | 8 | 0.191 | 6304620 | 35 A 13 |
| 14 | 140 | 11.5 | 20,5 | 19 | 8.5 | 8 | 0.214 | 6304700 | 35 A 14 |
| 17 | 145 | 12.0 | 25,0 | 23 | 10.5 | 10 | 0.323 | 6305000 | 35 A 17 |
| 19 | 165 | 15.0 | 27,5 | 23 | 12.5 | 12 | 0.361 | 6305270 | 35 A 19 |
| 22 | 185 | 16.0 | 32,0 | 27 | 12.5 | 12 | 0.570 | 6305510 | 35 A 22 |
| 24 | 205 | 19.0 | 34,5 | 29 | 14.5 | 14 | 0.760 | 6305860 | 35 A 24 |
| 27 | 215 | 21.0 | 38,5 | 29 | 14.5 | 14 | 0.805 | 6306160 | 35 A 27 |
| 30 | 225 | 22.0 | 42,0 | 33 | 17.0 | 16 | 1.124 | 6306320 | 35 A 30 |
| 36 | 260 | 27.0 | 50,0 | 37 | 19.0 | 18 | 1.050 | 6306670 | 35 A 36 |
| 46 | 290 | 33.0 | 62,0 | 41 | 21.0 | 20 | 1.710 | 6306830 | 35 A 46 |

| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | ⚖ kg | Code | No. |
|------|-----|------|----------------|----------------|----------------|------|-------|----------------|------------|
| 10 | 115 | 8.5 | 16,0 | 15 | 6.5 | 6 | 0.126 | 6307480 | DS 35 A 10 |
| 13 | 130 | 11.0 | 19,5 | 19 | 8.5 | 8 | 0.259 | 6307720 | DS 35 A 13 |
| 14 | 140 | 11.5 | 20,5 | 19 | 8.5 | 8 | 0.283 | 6307800 | DS 35 A 14 |
| 17 | 145 | 12.0 | 25,0 | 23 | 10.5 | 10 | 0.445 | 6308100 | DS 35 A 17 |
| 19 | 165 | 15.0 | 27,5 | 23 | 12.5 | 12 | 0.579 | 6308370 | DS 35 A 19 |
| 22 | 185 | 16.0 | 32,0 | 27 | 12.5 | 12 | 0.788 | 6308610 | DS 35 A 22 |
| 24 | 205 | 19.0 | 34,5 | 29 | 14.5 | 14 | 1.138 | 6308960 | DS 35 A 24 |
| 27 | 215 | 21.0 | 38,5 | 29 | 14.5 | 14 | 1.183 | 6309260 | DS 35 A 27 |
| 30 | 225 | 22.0 | 42,0 | 33 | 17.0 | 16 | 1.746 | 6309420 | DS 35 A 30 |
| 36 | 260 | 27.0 | 50,0 | 37 | 19.0 | 18 | 2.036 | 6309690 | DS 35 A 36 |
| 46 | 290 | 33.0 | 62,0 | 41 | 21.0 | 20 | 3.230 | 6309850 | DS 35 A 46 |

35 B - DS 35 B

SOCKET WRENCH solid, long pattern

- ▶ Solid pattern
- ▶ Acc. to DIN 3112, ISO 2236
- ▶ With extra deep hexagon heads and ball catch
- ▶ GEDORE vanadium steel 31CrV3, manganese-phosphated
- ▶ No. 35 B = Delivery without tommy bar
- ▶ No. DS 35 B = Delivery with tommy bar 35 D



| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | ⚖ kg | Code | No. |
|------|-----|------|----------------|----------------|----------------|------|-------|----------------|---------|
| 8 | 175 | 7.0 | 13,0 | 12 | 6.5 | 6 | 0.110 | 6310270 | 35 B 8 |
| 10 | 200 | 8.5 | 16,0 | 15 | 6.5 | 6 | 0.146 | 6310430 | 35 B 10 |
| 13 | 235 | 11.0 | 19,5 | 19 | 8.5 | 8 | 0.345 | 6310860 | 35 B 13 |
| 17 | 270 | 12.0 | 25,0 | 23 | 10.5 | 10 | 0.586 | 6311240 | 35 B 17 |
| 19 | 295 | 15.0 | 27,5 | 23 | 12.5 | 12 | 0.583 | 6311400 | 35 B 19 |
| 22 | 315 | 16.0 | 32,0 | 27 | 12.5 | 12 | 0.987 | 6311750 | 35 B 22 |
| 24 | 350 | 19.0 | 34,5 | 29 | 14.5 | 14 | 1.231 | 6311910 | 35 B 24 |
| 27 | 390 | 21.0 | 38,5 | 29 | 14.5 | 14 | 1.425 | 6312210 | 35 B 27 |
| 30 | 430 | 22.0 | 42,0 | 33 | 17.0 | 16 | 2.113 | 6312640 | 35 B 30 |
| 32 | 440 | 26.0 | 45,0 | 33 | 17.0 | 16 | 2.144 | 6312720 | 35 B 32 |
| 36 | 490 | 27.0 | 50,0 | 38 | 19.0 | 18 | 2.182 | 6312800 | 35 B 36 |



| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | ⚖ kg | Code | No. |
|------|-----|------|----------------|----------------|----------------|------|-------|----------------|------------|
| 8 | 175 | 7.0 | 13,0 | 12 | 6.5 | 6 | 0.144 | 6313290 | DS 35 B 8 |
| 10 | 200 | 8.5 | 16,0 | 15 | 6.5 | 6 | 0.179 | 6313450 | DS 35 B 10 |
| 13 | 235 | 11.0 | 19,5 | 19 | 8.5 | 8 | 0.414 | 6313880 | DS 35 B 13 |
| 17 | 270 | 12.0 | 25,0 | 23 | 10.5 | 10 | 0.707 | 6314340 | DS 35 B 17 |
| 19 | 295 | 15.0 | 27,5 | 23 | 12.5 | 12 | 0.801 | 6314500 | DS 35 B 19 |
| 22 | 315 | 16.0 | 32,0 | 27 | 12.5 | 12 | 1.205 | 6314850 | DS 35 B 22 |
| 24 | 350 | 19.0 | 34,5 | 29 | 14.5 | 14 | 1.608 | 6315070 | DS 35 B 24 |
| 27 | 390 | 21.0 | 38,5 | 29 | 14.5 | 14 | 1.803 | 6315310 | DS 35 B 27 |
| 30 | 430 | 22.0 | 42,0 | 33 | 17.0 | 16 | 2.735 | 6315740 | DS 35 B 30 |
| 32 | 440 | 26.0 | 45,0 | 33 | 17.0 | 16 | 2.765 | 6315820 | DS 35 B 32 |
| 36 | 490 | 27.0 | 50,0 | 38 | 19.0 | 18 | 3.168 | 6315900 | DS 35 B 36 |

 **35 D** 153 




**V 35 A - DSV 35 A****SOCKET WRENCH solid, short pattern**

- Solid pattern
- With extra deep square heads and ball catch
- GEDORE vanadium steel 31CrV3, manganese-phosphated
- No. V 35 A = Delivery without tommy bar
- No. DSV 35 A = Delivery with tommy bar 35 D

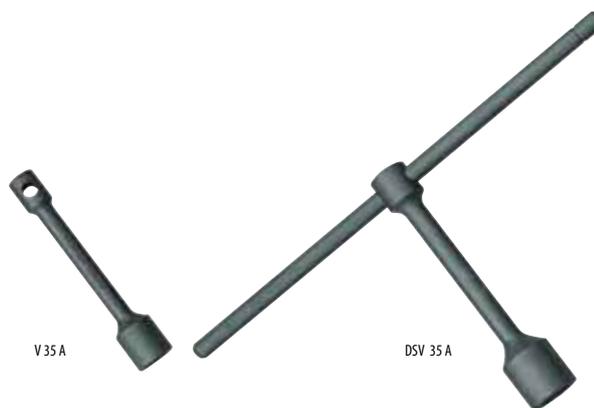


| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | kg | Code | No. |
|------|-----|----|----------------|----------------|----------------|------|-------|----------------|-----------|
| 7 | 80 | 15 | 13,5 | 15 | 8,5 | 8 | 0.072 | 6316390 | V 35 A 7 |
| 10 | 100 | 18 | 17,5 | 17 | 10,5 | 10 | 0.121 | 6316630 | V 35 A 10 |
| 13 | 100 | 22 | 23,5 | 23 | 12,5 | 12 | 0.231 | 6317010 | V 35 A 13 |
| 17 | 160 | 28 | 31,0 | 31 | 17,0 | 16 | 0.698 | 6317520 | V 35 A 17 |
| 19 | 200 | 30 | 34,0 | 31 | 17,0 | 16 | 0.901 | 6317790 | V 35 A 19 |
| 22 | 200 | 34 | 39,0 | 36 | 19,0 | 18 | 1.215 | 6318090 | V 35 A 22 |

| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | kg | Code | No. | € |
|------|-----|----|----------------|----------------|----------------|------|-------|----------------|-------------|-------|
| 7 | 80 | 15 | 13,5 | 15 | 8,5 | 8 | 0,141 | 6318840 | DSV 35 A 7 | 25,30 |
| 10 | 100 | 18 | 17,5 | 17 | 10,5 | 10 | 0,241 | 6319140 | DSV 35 A 10 | 27,60 |
| 13 | 100 | 22 | 23,5 | 23 | 12,5 | 12 | 0,449 | 6319490 | DSV 35 A 13 | 39,70 |
| 17 | 160 | 28 | 31,0 | 31 | 17,0 | 16 | 1,319 | 6319810 | DSV 35 A 17 | 49,60 |
| 19 | 200 | 30 | 34,0 | 31 | 17,0 | 16 | 1,523 | 6320150 | DSV 35 A 19 | 54,90 |
| 22 | 200 | 34 | 39,0 | 36 | 19,0 | 18 | 2,201 | 6320580 | DSV 35 A 22 | 59,20 |

V 35 B - DSV 35 B**SOCKET WRENCH solid, long pattern**

- Solid pattern
- With extra deep square heads and ball catch
- GEDORE vanadium steel 31CrV3, manganese-phosphated
- No. V 35 B = Delivery without tommy bar
- No. DSV 35 B = Delivery with tommy bar 35 D



| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | kg | Code | No. |
|------|-----|----|----------------|----------------|----------------|------|-------|----------------|-----------|
| 6 | 160 | 12 | 11,5 | 12 | 6,5 | 6 | 0.105 | 6321120 | V 35 B 6 |
| 7 | 160 | 15 | 13,5 | 15 | 8,5 | 8 | 0.145 | 6321200 | V 35 B 7 |
| 8 | 160 | 15 | 14,0 | 15 | 8,5 | 8 | 0.143 | 6321390 | V 35 B 8 |
| 9 | 200 | 18 | 16,0 | 17 | 10,5 | 10 | 0.239 | 6321470 | V 35 B 9 |
| 10 | 200 | 18 | 17,5 | 17 | 10,5 | 10 | 0.246 | 6321550 | V 35 B 10 |
| 12 | 200 | 20 | 22,0 | 21 | 12,5 | 12 | 0.386 | 6321710 | V 35 B 12 |
| 13 | 200 | 22 | 23,5 | 23 | 12,5 | 12 | 0.477 | 6321980 | V 35 B 13 |
| 14 | 200 | 24 | 26,0 | 25 | 14,5 | 14 | 0.555 | 6322010 | V 35 B 14 |
| 17 | 250 | 28 | 31,0 | 31 | 17,0 | 16 | 0.116 | 6322440 | V 35 B 17 |
| 19 | 320 | 30 | 34,0 | 31 | 17,0 | 16 | 1.565 | 6322600 | V 35 B 19 |
| 22 | 320 | 34 | 39,0 | 36 | 19,0 | 18 | 2.072 | 6322950 | V 35 B 22 |

| Ø mm | L | a | d ₁ | d ₂ | d ₃ | 35 D | kg | Code | No. |
|------|-----|----|----------------|----------------|----------------|------|-------|----------------|-------------|
| 6 | 160 | 12 | 11,5 | 12 | 6,5 | 6 | 0.139 | 6323680 | DSV 35 B 6 |
| 7 | 160 | 15 | 13,5 | 15 | 8,5 | 8 | 0.214 | 6323760 | DSV 35 B 7 |
| 8 | 160 | 15 | 14,0 | 15 | 8,5 | 8 | 0.212 | 6323840 | DSV 35 B 8 |
| 9 | 200 | 18 | 16,0 | 17 | 10,5 | 10 | 0.359 | 6323920 | DSV 35 B 9 |
| 10 | 200 | 18 | 17,5 | 17 | 10,5 | 10 | 0.367 | 6324060 | DSV 35 B 10 |
| 12 | 200 | 20 | 22,0 | 21 | 12,5 | 12 | 0.603 | 6324220 | DSV 35 B 12 |
| 13 | 200 | 22 | 23,5 | 23 | 12,5 | 12 | 0.695 | 6324300 | DSV 35 B 13 |
| 14 | 200 | 24 | 26,0 | 25 | 14,5 | 14 | 0.933 | 6324490 | DSV 35 B 14 |
| 17 | 250 | 28 | 31,0 | 31 | 17,0 | 16 | 1.737 | 6324730 | DSV 35 B 17 |
| 19 | 320 | 30 | 34,0 | 31 | 17,0 | 16 | 2.186 | 6325030 | DSV 35 B 19 |
| 22 | 320 | 34 | 39,0 | 36 | 19,0 | 18 | 3.057 | 6325460 | DSV 35 B 22 |

35 D**TOMMY BAR for 35 and V 35**

- Acc. to DIN 900 Form A
- With location grooves for socket wrenches
- Fully hardened, GEDORE vanadium steel 31CrV3, manganese-phosphated



| Ø | ↳ mm ↲ | kg | Code | No. |
|----|--------|-------|----------------|---------|
| 6 | 160 | 0.034 | 6326000 | 35 D 6 |
| 8 | 180 | 0.069 | 6326190 | 35 D 8 |
| 10 | 200 | 0.121 | 6326270 | 35 D 10 |
| 12 | 250 | 0.218 | 6326350 | 35 D 12 |

| Ø | ↳ mm ↲ | kg | Code | No. |
|----|--------|-------|----------------|---------|
| 14 | 320 | 0.378 | 6326430 | 35 D 14 |
| 16 | 400 | 0.621 | 6326510 | 35 D 16 |
| 18 | 500 | 0.986 | 6326780 | 35 D 18 |
| 20 | 630 | 1.519 | 6326860 | 35 D 20 |



NUT DRIVERS WITH HANDLE

2133

NUT DRIVER WITH 3C-HANDLE

- ▶ Acc. to DIN 3125, ISO 2725-1
- ▶ 3-component handles Power-Grip³ with hanging hole
- ▶ Ergonomic handle design enables precise and fatigue-free working
- ▶ Positive-fit joint of handle and blade for optimum transmission of force
- ▶ Type of drive marked at end of the handle
- ▶ Head depth 25 mm, blade length 125 mm
- ▶ Size 2.5 - 3.5 with stepped head \varnothing 5 mm
- ▶ 10 mm and larger with hexagon bolster size 13 mm
- ▶ Blade from GEDORE molybdenum-vanadium-Plus steel



| \varnothing mm | L ₁ | L ₂ | d | \varnothing | mm | kg | Code | No. |
|------------------|----------------|----------------|------|---------------|----|-------|----------------|----------|
| 5.0 | 225 | 125 | 8,0 | 5 | — | 0.097 | 1746723 | 2133 5 |
| 5.5 | 225 | 125 | 8,0 | 5 | — | 0.107 | 1746731 | 2133 5,5 |
| 6.0 | 225 | 125 | 9,0 | 5 | — | 0.109 | 1746758 | 2133 6 |
| 7.0 | 235 | 125 | 11,0 | 6 | — | 0.135 | 1746766 | 2133 7 |
| 8.0 | 235 | 125 | 12,0 | 6 | — | 0.152 | 1746855 | 2133 8 |
| 9.0 | 235 | 125 | 13,0 | 6 | — | 0.168 | 1746863 | 2133 9 |
| 10.0 | 245 | 125 | 14,0 | 6 | 10 | 0.198 | 1746898 | 2133 10 |
| 11.0 | 245 | 125 | 16,0 | 8 | 13 | 0.202 | 1746901 | 2133 11 |
| 12.0 | 245 | 125 | 17,0 | 8 | 13 | 0.221 | 1746928 | 2133 12 |
| 13.0 | 245 | 125 | 18,0 | 8 | 13 | 0.225 | 1746944 | 2133 13 |

VDE 2133


536



2133 T


NUT DRIVER WITH 2C-T-HANDLE

- ▶ With hanging hole
- ▶ Head depth 25 mm
- ▶ GEDORE vanadium steel 31CrV3, matt chrome-plated

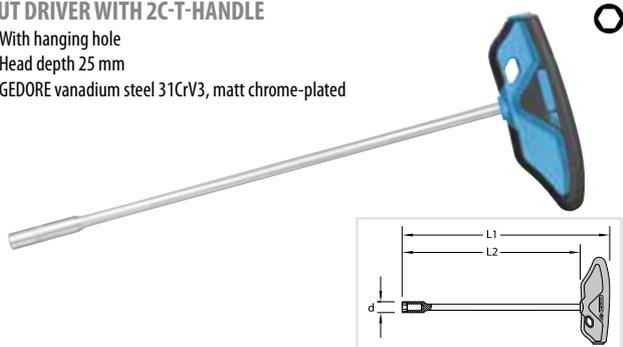


| \varnothing mm | L ₁ | L ₂ | d | kg | Code | No. |
|------------------|----------------|----------------|------|-------|----------------|------------|
| 2.5 | 187 | 160 | 5.0 | 0.040 | 2647559 | 2133 T 2,5 |
| 3.0 | 187 | 160 | 5.5 | 0.040 | 2647567 | 2133 T 3 |
| 3.2 | 187 | 160 | 5.5 | 0.040 | 2647575 | 2133 T 3,2 |
| 3.5 | 222 | 195 | 6.0 | 0.040 | 2647583 | 2133 T 3,5 |
| 4.0 | 222 | 195 | 6.9 | 0.101 | 2647591 | 2133 T 4 |
| 4.5 | 222 | 195 | 7.0 | 0.101 | 2647605 | 2133 T 4,5 |
| 5.0 | 222 | 195 | 8.0 | 0.091 | 2647613 | 2133 T 5 |
| 5.5 | 222 | 195 | 8.0 | 0.101 | 2647621 | 2133 T 5,5 |
| 6.0 | 222 | 195 | 9.0 | 0.101 | 2647648 | 2133 T 6 |
| 7.0 | 222 | 195 | 11.0 | 0.101 | 2647656 | 2133 T 7 |
| 8.0 | 268 | 230 | 12.0 | 0.180 | 2647664 | 2133 T 8 |
| 9.0 | 268 | 230 | 13.0 | 0.180 | 2647672 | 2133 T 9 |
| 10.0 | 268 | 230 | 14.0 | 0.180 | 2647680 | 2133 T 10 |
| 11.0 | 268 | 230 | 16.0 | 0.200 | 2647699 | 2133 T 11 |
| 12.0 | 268 | 230 | 17.0 | 0.220 | 2647702 | 2133 T 12 |
| 13.0 | 268 | 230 | 18.0 | 0.240 | 2647710 | 2133 T 13 |
| 14.0 | 268 | 230 | 19.7 | 0.230 | 2647729 | 2133 T 14 |

2C-T-HANDLE

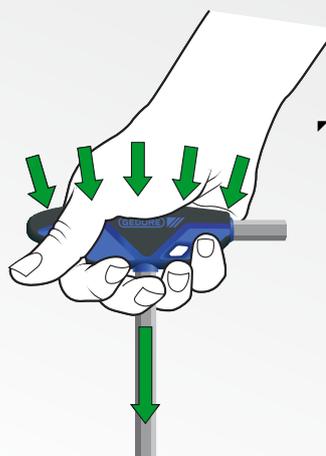

- ▶ Asymmetrical 2-component wing handle for high torque level when loosening or tightening. The lengthened wing provides an optimum contact surface for the palm of one's hand. It thus easily transfers considerable forces in a relaxed hand's position.


- ▶ With T-shaped cross-section: broad at the top and slender below. In this way one's hand takes on a firm grip leading to vigorous working over an extended period without any fatigue.

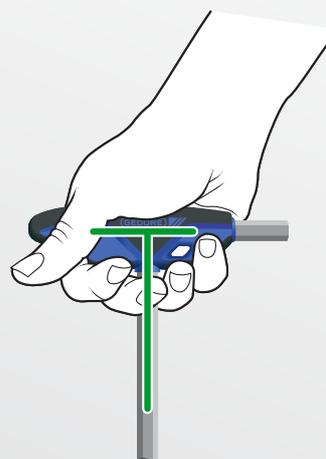

- ▶ Soft zones where sensitive hand zones grip e.g. finger tips. Hard zones where robust hand zones grip.
- ▶ Hard component made of fibre-glass reinforced plastic with special-purpose glass fibres. The benefits of short glass fibres (rigidity and firmness) are combined with that of long glass fibres (impact strength).
- ▶ Soft component made of thermoplastic elastomer
- ▶ The concave form ensures exact hand centering and stops any blade tilting.
- ▶ With hanging hole

**33 T****NUT DRIVER WITH T-HANDLE**


- ▶ With hanging hole
- ▶ Head depth 25 mm
- ▶ GEDORE vanadium steel 31CrV3, matt chrome-plated

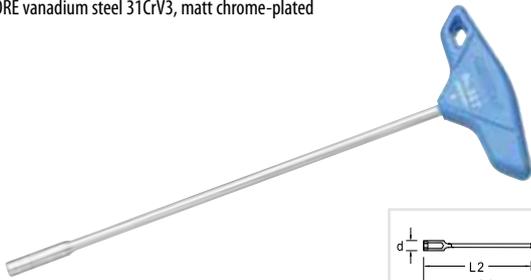

| Ø mm | L ₁ | L ₂ | d | ⚖ kg | Code | No. |
|------|----------------|----------------|------|-------|----------------|----------|
| 5.5 | 227.5 | 195 | 8.0 | 0.092 | 6353320 | 33 T 5,5 |
| 6.0 | 227.5 | 195 | 9.0 | 0.097 | 6357580 | 33 T 6 |
| 7.0 | 227.5 | 195 | 11.0 | 0.089 | 6357660 | 33 T 7 |
| 8.0 | 269.0 | 230 | 12.0 | 0.146 | 6357740 | 33 T 8 |
| 9.0 | 269.0 | 230 | 13.0 | 0.165 | 6357820 | 33 T 9 |
| 10.0 | 269.0 | 230 | 14.0 | 0.156 | 6357900 | 33 T 10 |
| 11.0 | 269.0 | 230 | 16.0 | 0.176 | 6353400 | 33 T 11 |
| 12.0 | 269.0 | 230 | 17.0 | 0.201 | 6353590 | 33 T 12 |
| 13.0 | 269.0 | 230 | 18.0 | 0.195 | 6358040 | 33 T 13 |
| 14.0 | 269.0 | 230 | 19.7 | 0.214 | 6366060 | 33 T 14 |

2133 TLM**NUT DRIVER WITH 2C-T-HANDLE with magnet, long pattern**


- ▶ With hanging hole
- ▶ Head depth 25 mm
- ▶ GEDORE vanadium steel 31CrV3, matt chrome-plated

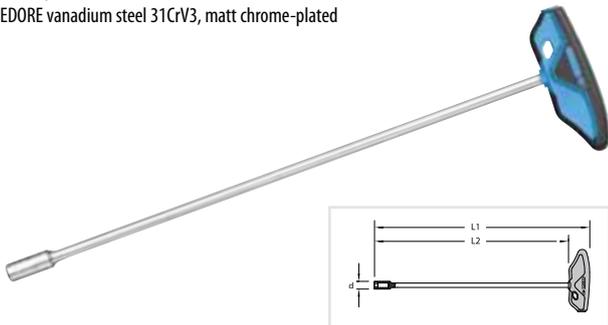

| Ø mm | L ₁ | L ₂ | d | ⚖ kg | Code | No. |
|------|----------------|----------------|----|-------|----------------|-------------|
| 8 | 388 | 350 | 12 | 0.221 | 2335484 | 2133 TLM 8 |
| 10 | 388 | 350 | 14 | 0.220 | 2337347 | 2133 TLM 10 |
| 13 | 388 | 350 | 18 | 0.280 | 2337355 | 2133 TLM 13 |

33 TLM**NUT DRIVER WITH T-HANDLE with magnet, long pattern**

- ▶ With hanging hole
- ▶ Head depth 25 mm
- ▶ GEDORE vanadium steel 31CrV3, matt chrome-plated

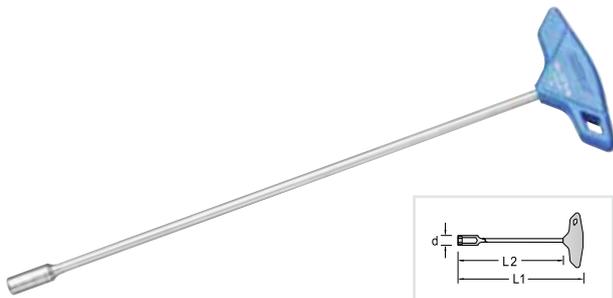

| Ø mm | L ₁ | L ₂ | d | ⚖ kg | Code | No. |
|------|----------------|----------------|----|-------|----------------|-----------|
| 8 | 389 | 350 | 12 | 0.188 | 6352190 | 33 TLM 8 |
| 10 | 389 | 350 | 14 | 0.262 | 6353160 | 33 TLM 10 |
| 13 | 389 | 350 | 18 | 0.271 | 6353240 | 33 TLM 13 |

TX2133 T**NUT DRIVER WITH 2C-T-HANDLE for protruding TORX® head screws**

- ▶ From E4 to E10
- ▶ With hanging hole
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⚙ | M | mm | L ₁ | L ₂ | d | ⚖ kg | Code | No. |
|-----|---------|-------------|----------------|----------------|----|-------|----------------|---------------|
| E4 | M3 | 3,86 x 2,88 | 187 | 160 | 7 | 0.131 | 2494639 | TX 2133 T E4 |
| E5 | M4 | 4,73 x 3,46 | 187 | 160 | 7 | 0.121 | 2494760 | TX 2133 T E5 |
| E6 | M5 | 5,74 x 4,11 | 233 | 195 | 8 | 0.120 | 2495449 | TX 2133 T E6 |
| E7 | M6 | 6,16 x 4,55 | 233 | 195 | 10 | 0.160 | 2495457 | TX 2133 T E7 |
| E8 | M6 - M7 | 7,52 x 5,4 | 233 | 195 | 11 | 0.160 | 2495805 | TX 2133 T E8 |
| E10 | M8 | 9,42 x 6,92 | 268 | 230 | 13 | 0.180 | 2498588 | TX 2133 T E10 |

TX 33 T**NUT DRIVER WITH T-HANDLE for protruding TORX® head screws**

- ▶ From E4 to E10
- ▶ Ergonomically designed blue handle, non-slip grained surface, for higher torques
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⚙ | M | mm | L ₁ | L ₂ | d | ⚖ kg | Code | No. |
|-----|---------|-------------|----------------|----------------|----|-------|----------------|-------------|
| E5 | M4 | 4,73 x 3,46 | 192.5 | 160 | 7 | 0.079 | 1394967 | TX 33 T E5 |
| E6 | M5 | 5,74 x 4,11 | 234.0 | 195 | 8 | 0.081 | 1394975 | TX 33 T E6 |
| E7 | M6 | 6,16 x 4,55 | 234.0 | 195 | 10 | 0.103 | 1394983 | TX 33 T E7 |
| E8 | M6 - M7 | 7,52 x 5,4 | 234.0 | 195 | 11 | 0.105 | 1395009 | TX 33 T E8 |
| E10 | M8 | 9,42 x 6,92 | 269.0 | 230 | 13 | 0.175 | 1395017 | TX 33 T E10 |




TUBULAR BOX SPANNERS

26 R

TUBULAR BOX SPANNER

- ▶ Acc. to DIN 896 Form B, ISO 2236, ISO 1085
- ▶ Hollow shaft, in tubular steel, DIN 2391 seamless, hardened, made from material C35, chrome-plated
- ▶ With hole for tommy bars 26 D and 26 RS (please order separately)
- ▶ * not standardised



| Ø mm | * | L | a ₁ | a ₂ | 26 D | 26 RS | ⚖ | Code | No. | Ø mm | * | L | a ₁ | a ₂ | 26 D | 26 RS | ⚖ | Code | No. |
|---------|---|-----|----------------|----------------|------|-------|-------|----------------|------------|---------|---|-----|----------------|----------------|------|-------|-------|----------------|------------|
| 5,5 x 7 | * | 105 | 5.0 | 6.0 | 5 | 1 | 0.036 | 6222810 | 26 R 5,5x7 | 18 x 19 | | 155 | 13.0 | 15.0 | 12 | 3 | 0.161 | 6211960 | 26 R 18x19 |
| 6 x 7 | | 105 | 5.0 | 6.0 | 5 | 1 | 0.035 | 6210050 | 26 R 6x7 | 19 x 22 | | 165 | 15.0 | 16.0 | 12 | 3 | 0.261 | 6212180 | 26 R 19x22 |
| 8 x 9 | | 105 | 6.0 | 7.0 | 6 | 1 | 0.041 | 6210210 | 26 R 8x9 | 20 x 22 | | 165 | 15.0 | 16.0 | 12 | 3 | 0.264 | 6212260 | 26 R 20x22 |
| 8 x 10 | | 120 | 6.0 | 7.5 | 6 | 1 | 0.049 | 6210480 | 26 R 8x10 | 21 x 23 | | 165 | 15.0 | 17.0 | 14 | 3 | 0.291 | 6212340 | 26 R 21x23 |
| 9 x 10 | * | 120 | 7.0 | 7.5 | 6 | 1 | 0.050 | 6210560 | 26 R 9x10 | 22 x 24 | | 180 | 16.0 | 19.0 | 14 | 3 | 0.291 | 6212420 | 26 R 22x24 |
| 10 x 11 | | 120 | 7.5 | 8.0 | 6 | 1 | 0.055 | 6210640 | 26 R 10x11 | 24 x 26 | | 180 | 19.0 | 21.0 | 14 | 3 | 0.314 | 6212500 | 26 R 24x26 |
| 10 x 13 | | 140 | 7.5 | 9.5 | 8 | 2 | 0.072 | 6210720 | 26 R 10x13 | 24 x 27 | | 180 | 19.0 | 21.0 | 14 | 3 | 0.319 | 6212690 | 26 R 24x27 |
| 11 x 13 | | 140 | 8.0 | 9.5 | 8 | 2 | 0.074 | 6210800 | 26 R 11x13 | 25 x 28 | | 195 | 19.0 | 21.0 | 16 | 3 | 0.365 | 6212770 | 26 R 25x28 |
| 12 x 13 | | 140 | 9.0 | 9.5 | 8 | 2 | 0.073 | 6210990 | 26 R 12x13 | 27 x 30 | | 195 | 21.0 | 22.0 | 16 | 3 | 0.386 | 6212850 | 26 R 27x30 |
| 12 x 14 | | 140 | 9.0 | 10.0 | 8 | 2 | 0.083 | 6211020 | 26 R 12x14 | 27 x 32 | | 195 | 21.0 | 26.0 | 16 | 3 | 0.415 | 6212930 | 26 R 27x32 |
| 13 x 14 | * | 140 | 9.5 | 10.0 | 8 | 2 | 0.083 | 6211100 | 26 R 13x14 | 30 x 32 | | 195 | 22.0 | 26.0 | 16 | 3 | 0.409 | 6213070 | 26 R 30x32 |
| 13 x 15 | * | 140 | 9.5 | 11.0 | 8 | 2 | 0.089 | 6211290 | 26 R 13x15 | 30 x 36 | | 215 | 22.0 | 27.0 | 18 | - | 0.528 | 6213150 | 26 R 30x36 |
| 14 x 15 | | 140 | 10.0 | 11.0 | 8 | 2 | 0.088 | 6211370 | 26 R 14x15 | 32 x 36 | | 215 | 26.0 | 27.0 | 18 | - | 0.535 | 6213230 | 26 R 32x36 |
| 13 x 17 | | 150 | 9.5 | 12.0 | 10 | 2 | 0.139 | 6211450 | 26 R 13x17 | 36 x 41 | | 215 | 27.0 | 30.0 | 18 | - | 0.678 | 6213310 | 26 R 36x41 |
| 14 x 17 | | 150 | 10.0 | 12.0 | 10 | 2 | 0.140 | 6211530 | 26 R 14x17 | 41 x 46 | | 235 | 30.0 | 33.0 | 20 | - | 0.823 | 6213580 | 26 R 41x46 |
| 16 x 17 | | 150 | 11.0 | 12.0 | 10 | 2 | 0.139 | 6211610 | 26 R 16x17 | 46 x 50 | | 235 | 33.0 | 35.0 | 20 | - | 0.869 | 6213660 | 26 R 46x50 |
| 16 x 18 | | 150 | 11.0 | 13.0 | 10 | 2 | 0.152 | 6223030 | 26 R 16x18 | 50 x 55 | | 235 | 35.0 | 38.0 | 20 | - | 1.126 | 6213740 | 26 R 50x55 |
| 17 x 19 | | 155 | 12.0 | 15.0 | 12 | 3 | 0.161 | 6211880 | 26 R 17x19 | | | | | | | | | | |

26 D

TOMMY BAR

- ▶ Acc. to DIN 900 Form A
- ▶ GEDORE vanadium steel 31CrV3, chrome-plated up to 20 mm Ø, manganese-phosphated up from 25 mm Ø, fully hardened



| Ø | ↳ mm | ⚖ | Code | No. | Ø | ↳ mm | ⚖ | Code | No. |
|----|------|-------|----------------|---------|----|------|-------|----------------|---------|
| 5 | 122 | 0.021 | 6208310 | 26 D 5 | 14 | 316 | 0.386 | 6209040 | 26 D 14 |
| 6 | 157 | 0.040 | 6208580 | 26 D 6 | 16 | 396 | 0.634 | 6209120 | 26 D 16 |
| 8 | 177 | 0.073 | 6208740 | 26 D 8 | 18 | 495 | 0.995 | 6209200 | 26 D 18 |
| 10 | 197 | 0.127 | 6208820 | 26 D 10 | 20 | 625 | 1.555 | 6209390 | 26 D 20 |
| 12 | 246 | 0.228 | 6208900 | 26 D 12 | | | | | |

KD 26 R

TUBULAR BOX SPANNER SET with tommy bars

- ▶ Hollow shaft, in tubular steel, DIN 2391 seamless, hardened, made from material C35, chrome-plated




| pieces | Contents | ⚖ | Code | No. |
|--------|--|-------|----------------|-------------|
| 8 | 26 R 6x7 8x9 10x11 12x13 14x15 16x17 18x19 20x22 26 RS 1 2 3 | 1.564 | 6218540 | KD 26 R-8 |
| 12 | 26 R 6x7 8x9 10x11 12x13 14x15 16x17 18x19 20x22 21x23 24x27 25x28 30x32 26 RS 1 2 3 | 2.895 | 6218890 | KD 26 R-120 |



626

TUBULAR BOX SPANNER heavy-duty pattern

- Similar to DIN 896, Form A, ISO 2236, ISO 1085
- With hexagon shaft and holes for turning, either with a spanner or a tommy bar (626 S / 26 RS-626 S, see table, please order separately)
- Sizes 6x7 and 8x9 mm with no hole
- GEDORE vanadium steel 31CrV3, chrome-plated, polished heads



| Ø mm | L | a ₁ | a ₂ | d ₁ | d ₂ | ● mm | 26 RS-626 S | ↔ | Code | No. | Ø mm | L | a ₁ | a ₂ | d ₁ | d ₂ | ● mm | 26 RS-626 S | ↔ | Code | No. | |
|---------|-----|----------------|----------------|----------------|----------------|------|-------------|-------|----------------|-----------|---------|-----|----------------|----------------|----------------|----------------|------|---------------|-------|----------------|-----------|--|
| 6 x 7 | 105 | 6.0 | 7.0 | 9.5 | 10.5 | 8 | 626 S 1 | 0.037 | 6525120 | 626 6x7 | 18 x 19 | 165 | 15.0 | 17.5 | 24.5 | 26.0 | 18 | 626 S 2 | 0.242 | 6526440 | 626 18x19 | |
| 8 x 9 | 110 | 7.0 | 8.0 | 12.0 | 13.0 | 9 | 626 S 1 | 0.052 | 6525200 | 626 8x9 | 19 x 22 | 175 | 17.5 | 18.5 | 26.0 | 30.0 | 19 | 626 S 2 | 0.288 | 6526520 | 626 19x22 | |
| 10 x 11 | 120 | 9.0 | 9.5 | 14.5 | 16.0 | 11 | 626 S 1 | 0.072 | 6525390 | 626 10x11 | 20 x 22 | 175 | 17.5 | 18.5 | 27.5 | 30.0 | 19 | 626 S 2 | 0.306 | 6526600 | 626 20x22 | |
| 12 x 13 | 140 | 10.5 | 11.0 | 17.0 | 18.5 | 13 | 626 S 1 | 0.117 | 6525470 | 626 12x13 | 24 x 26 | 195 | 21.5 | 23.5 | 32.5 | 34.5 | 24 | 26 RS-626 S-3 | 0.452 | 6526870 | 626 24x26 | |
| 13 x 17 | 155 | 11.0 | 14.0 | 18.5 | 23.0 | 15 | 626 S 2 | 0.160 | 6520750 | 626 13x17 | 24 x 27 | 195 | 21.5 | 23.5 | 32.5 | 36.0 | 24 | 26 RS-626 S-3 | 0.493 | 6526950 | 626 24x27 | |
| 14 x 15 | 145 | 11.5 | 13.0 | 19.5 | 21.0 | 14 | 626 S 1 | 0.145 | 6525710 | 626 14x15 | 30 x 32 | 210 | 25.0 | 29.0 | 39.5 | 42.5 | 30 | 26 RS-626 S-3 | 0.725 | 6527170 | 626 30x32 | |
| 16 x 17 | 155 | 13.0 | 14.0 | 22.0 | 23.0 | 16 | 626 S 2 | 0.189 | 6526280 | 626 16x17 | 32 x 36 | 225 | 29.0 | 30.5 | 42.5 | 48.0 | 32 | 26 RS-626 S-3 | 0.898 | 6527250 | 626 32x36 | |
| 17 x 19 | 165 | 14.0 | 17.5 | 23.0 | 26.0 | 18 | 626 S 2 | 0.233 | 6526360 | 626 17x19 | | | | | | | | | | | | |

KD 626

TUBULAR BOX SPANNER SET with tommy bars

- Similar to DIN 896, Form A, ISO 2236, ISO 1085
- With hexagon shaft and holes for turning, either with a spanner or a tommy bar (626 S / 26 RS-626 S)
- Sizes 6x7 and 8x9 mm with no hole
- GEDORE vanadium steel 31CrV3, chrome-plated, polished heads



| pieces | Contents | ↔ | Code | No. | |
|--------|---|-------------------------|-------|----------------|-----------|
| 8 | 626 6x7 8x9 10x11 12x13 14x15 16x17 18x19 20x22 | 626 S 1 2 | 1.434 | 6528730 | KD 626-8 |
| 10 | 626 6x7 8x9 10x11 12x13 14x15 16x17 18x19 20x22 24x27 30x32 | 626 S 1 2 26 RS-626 S-3 | 3.080 | 2803550 | KD 626-10 |

26 RS

STEPPED TOMMY BAR

- GEDORE vanadium steel 31CrV3, chrome-plated, fully hardened



| Ø | Ø ₂ | Ø ₃ | ↳ mm ↲ | ↔ | Code | No. |
|------|----------------|----------------|--------|-------|----------------|---------------|
| 5,0 | 6,0 | | 190 | 0.045 | 6219350 | 26 RS 1 |
| 8,0 | 10,0 | | 240 | 0.149 | 6219430 | 26 RS 2 |
| 11,7 | 13,7 | 16.0 | 310 | 0.492 | 6528220 | 26 RS-626 S-3 |

626 S

STEPPED TOMMY BAR

- GEDORE vanadium steel 31CrV3, chrome-plated, fully hardened



| Ø ₁ | Ø ₂ | Ø ₃ | Ø ₄ | Ø ₅ | ↳ mm ↲ | ↔ | Code | No. |
|----------------|----------------|----------------|----------------|----------------|--------|-------|----------------|---------------|
| 3,7 | 4,7 | 5.2 | 7.0 | | 190 | 0.050 | 6528060 | 626 S 1 |
| 6,7 | 7,7 | 8.7 | 9.7 | 11.0 | 240 | 0.159 | 6528140 | 626 S 2 |
| 11,7 | 13,7 | 16.0 | | | 310 | 0.492 | 6528220 | 26 RS-626 S-3 |