



STRAP WRENCHES

36

STRAP WRENCH

- With strong, non-slip fabric strap (E-36), extra wide = 25 mm
- 36 1-140 made from C45 steel
- 36 2-200 made from GEDORE vanadium steel 31CrV3
- Chrome-plated



| ∅ mm | ∅ inch | l mm | mm | kg | Code | No. |
|------|--------|------|----|-------|---------|----------|
| 140 | 9/64 | 220 | 25 | 0.278 | 6327320 | 36 1-140 |
| 200 | 13/64 | 285 | 25 | 0.578 | 6327400 | 36 2-200 |

E-36

STRAP WRENCH

- Strong, non-slip fabric strap, extra wide = 25 mm



| l mm | mm | kg | Code | No. |
|------|----|-------|---------|------------|
| 480 | 25 | 0.062 | 5327380 | E-36 1-140 |
| 900 | 25 | 0.104 | 5327460 | E-36 2-200 |

36Z

SPECIAL STRAP WRENCH

- For tightening and counter-holding V-belt pulley wheels
- Spare strap E-36 Z



| l mm | ∅ mm | ∅ inch | kg | Code | No. |
|------|------|--------|-------|---------|----------|
| 257 | 160 | 5/32 | 0.379 | 6320070 | 36 Z-140 |

E-36 Z

SPARE STRAP

| l mm | kg | Code | No. |
|------|-------|---------|------------|
| 257 | 0.080 | 1380613 | E-36 Z-140 |

126

STRAP WRENCH

- Very gentle to surfaces, particularly suitable for chrome-plated fittings and polished surfaces
- Handle in light metal, enamelled blue
- With high-strength nylon strap



| ∅ mm | ∅ inch | l mm | mm | kg | Code | No. |
|------|--------|------|----|-------|---------|--------|
| 220 | 8 | 300 | 27 | 0.325 | 1468308 | 126008 |

E 126

SPARE STRAP

- High-strength nylon strap



| l mm | mm | kg | Code | No. |
|------|----|-------|---------|--------|
| 950 | 27 | 0.035 | 1468316 | 126208 |

WATER PUMP / UNIVERSAL PLIERS

142

UNIVERSAL PLIERS

- Acc. to DIN ISO 8976 Form C
- With safety box joint and protection against blocking
- Fine adjustment
- 142 7 = 17 settings
- 142 10 = 15 settings
- 142 12 = 17 settings
- Single-hand push-button adjustment
- Long slim jaws
- Offset gripping faces for self-gripping of nuts and pipes
- GEDORE special chrome-vanadium steel
- Induction-rehardened serrated faces
- Model C = slim handles with forged serrations
- Model TL = agate-grey, with blue dipped handle protectors
- Model JC = chrome-plated, 2-component handles



142-10 C



142-10 JC




142-10 TL



142-12 TL



142-12 C




| L ₁ | L ₂ | b | h | mm | kg | Code | No. |
|----------------|----------------|-----|----|----|-------|---------|-----------|
| 180 | 32 | 6.5 | 40 | 37 | 0.183 | 2668211 | 142 7 TL |
| 180 | 32 | 6.5 | 40 | 37 | 0.173 | 2668238 | 142 7 C |
| 255 | 39 | 7.5 | 48 | 38 | 0.371 | 6416180 | 142 10 TL |
| 250 | 39 | 7.5 | 48 | 38 | 0.380 | 6416260 | 142 10 C |
| 260 | 39 | 7.5 | 48 | 38 | 0.417 | 6416340 | 142 10 JC |
| 309 | 43 | 8.5 | 55 | 44 | 0.550 | 1995413 | 142 12 TL |
| 300 | 43 | 8.5 | 55 | 44 | 0.530 | 1995553 | 142 12 C |



143

UNIVERSAL PLIERS 6 settings

- Acc. to DIN ISO 8976 Form B
- Slim head
- Forged twin-groove lay-on slip joint and toothed recess
- Offset gripping faces for self-gripping of nuts and pipes
- With finger protection
- For pipes up to 1.1/2" and nuts up to 38 mm
- GEDORE special chrome-vanadium steel, chrome-plated
- Induction-rehardened serrated faces
- Model C = slim handles with forged serrations
- Model JC = chrome-plated, 2-component handles




| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|------|----|----|-------|---------|-----------|
| 256 | 40 | 10.6 | 56 | 38 | 0.340 | 6410650 | 143 10 C |
| 262 | 40 | 10.6 | 56 | 38 | 0.390 | 6415880 | 143 10 JC |

144

MECHANICS PLIERS 7 settings

- Acc. to DIN ISO 8976 Form A
- Lay-on slip joint and straight, serrated jaws
- GEDORE special chrome-vanadium steel
- Induction-rehardened serrated faces





| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|-----|----|----|-------|---------|-------------|
| 113 | 13 | 3.8 | 23 | 16 | 0.042 | 6411110 | 144 4.1/2 C |
| 175 | 22 | 5.5 | 35 | 26 | 0.138 | 6411380 | 144 7 C |

145

WATER PUMP PLIERS

- Acc. to DIN ISO 8976 Form A
- Lay-on slip joint and toothed recess
- Induction-rehardened serrated faces, with finger protection
- GEDORE special chrome-vanadium steel, chrome-plated
- Model C = handles cross-hatched
- Model JC = with 2-component handle sleeves
- 145 10 = 7 settings, with extra narrow jaws
- 145 15 = 9 settings
- 145 20 = 11 settings

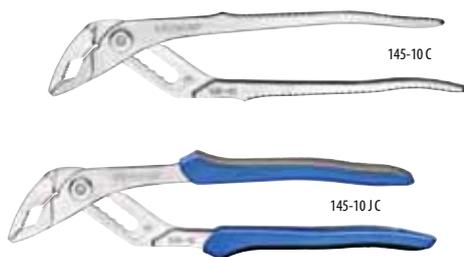


| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|------|----|----|-------|---------|-----------|
| 250 | 41 | 7.8 | 47 | 39 | 0.365 | 6412000 | 145 10 C |
| 260 | 41 | 7.8 | 47 | 39 | 0.425 | 6415610 | 145 10 JC |
| 375 | 46 | 10.4 | 72 | 50 | 0.854 | 6412190 | 145 15 C |
| 500 | 55 | 13.8 | 98 | 65 | 1.747 | 6412270 | 145 20 C |

146

UNIVERSAL PLIERS 7 settings

- Acc. to DIN ISO 8976 Form C
- With safety box joint and finger protection
- Automatic clamping with offset gripping surfaces
- GEDORE special chrome-vanadium steel, chrome-plated, with polished surface
- Induction-rehardened serrated faces
- Model C = slim handles with forged serrations
- Model JC = chrome-plated, 2-component handles



| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|-----|----|----|-------|---------|-----------|
| 250 | 32.5 | 4.8 | 48 | 31 | 0.335 | 6413240 | 146 10 C |
| 250 | 32.5 | 4.8 | 48 | 31 | 0.400 | 2672626 | 146 10 JC |

146 B

SPECIAL WATER PUMP PLIERS 5 settings

- Acc. to DIN ISO 8976 Form C
- With fast adjustment and tooth-lock box joint and toothed aperture
- Absolutely safe - no slipping out of adjustment during work
- With finger protection
- GEDORE special chrome-vanadium steel, chrome-plated, polished




| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|---|----|----|-------|---------|----------|
| 250 | 45 | 8 | 55 | 50 | 0.485 | 6412510 | 146 B 10 |

9144

WATER PUMP PLIERS

- To DIN ISO 8976
- Chrome-vanadium steel
- With box joint
- Drop forged



| L ₁ | L ₂ | b | h | mm | | Code | No. |
|----------------|----------------|-----|----|----|-------|---------|--------|
| 175 | 28 | 7.0 | 33 | 26 | 0.150 | 4533230 | 914417 |
| 240 | 35 | 7.5 | 40 | 33 | 0.290 | 4533310 | 914424 |
| 300 | 40 | 9.0 | 60 | 45 | 0.480 | 4533580 | 914430 |

