
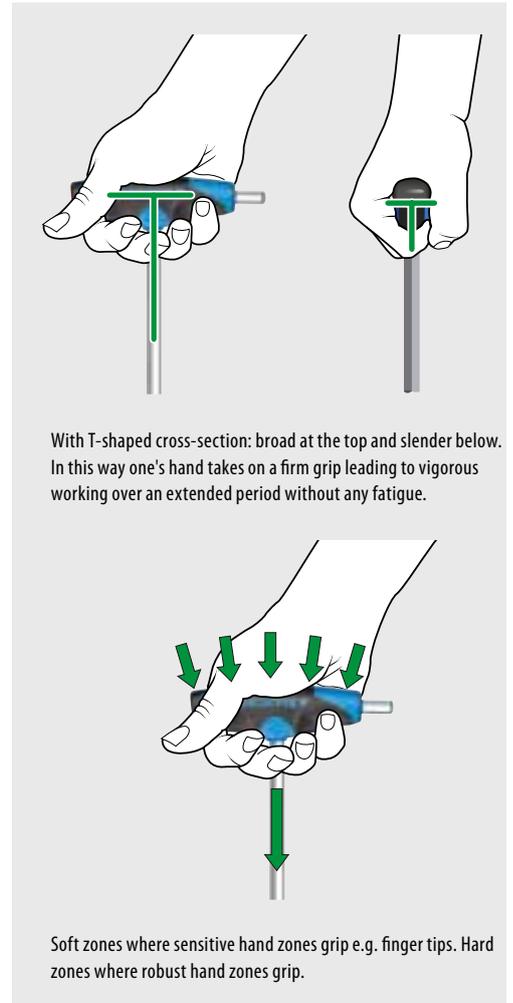


## 2GT-HANDLE


> 2-component wing handle for high torque level when loosening or tightening. The lengthened wing provides an optimum contact surface for the palm of one's hand. It thus easily transfers considerable forces in a relaxed hand's position.

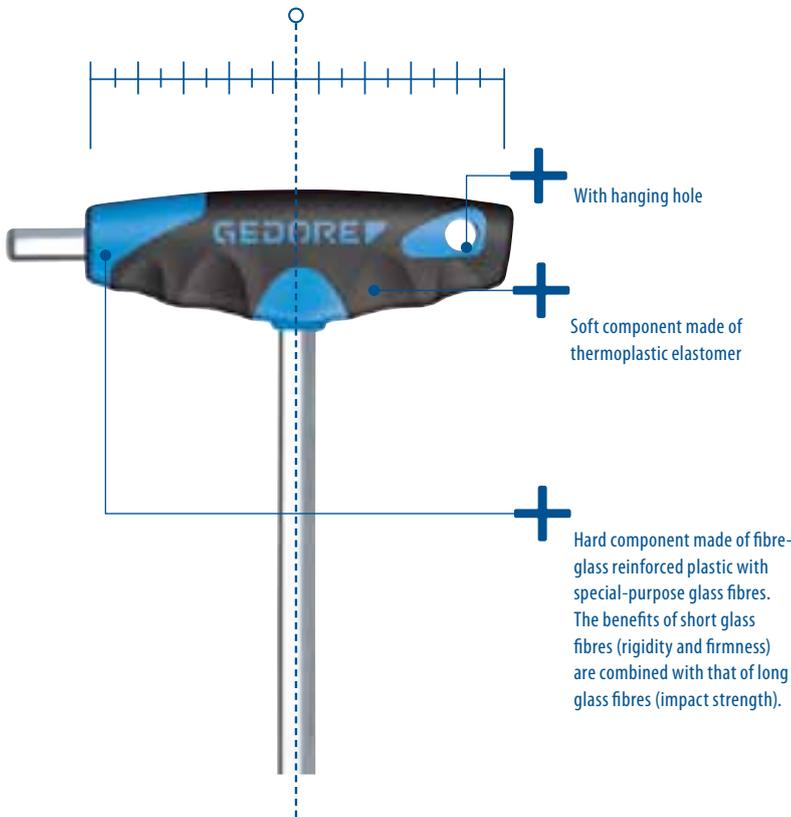

## 2142 T (MM) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated

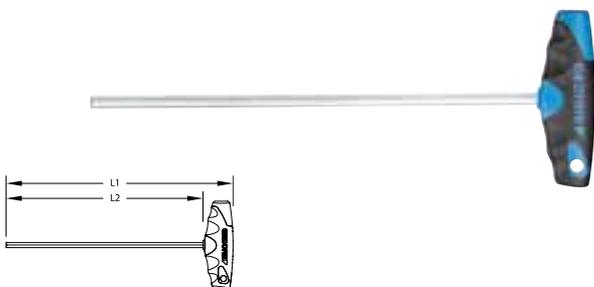


| ● mm | L <sub>1</sub> | L <sub>2</sub> | ⚖     | Code    | No.      |
|------|----------------|----------------|-------|---------|----------|
| 2    | 152            | 125            | 0.061 | 2647257 | 2142T2   |
| 2,5  | 152            | 125            | 0.091 | 2647265 | 2142T2,5 |
| 3    | 152            | 125            | 0.071 | 2647273 | 2142T3   |
| 4    | 152            | 125            | 0.080 | 2647281 | 2142T4   |
| 5    | 177            | 150            | 0.100 | 2647303 | 2142T5   |
| 6    | 188            | 150            | 0.140 | 2647311 | 2142T6   |
| 7    | 213            | 175            | 0.160 | 2681439 | 2142T7   |
| 8    | 213            | 175            | 0.221 | 2647338 | 2142T8   |
| 10   | 238            | 200            | 0.201 | 2647346 | 2142T10  |

## 2142 T (AF) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated


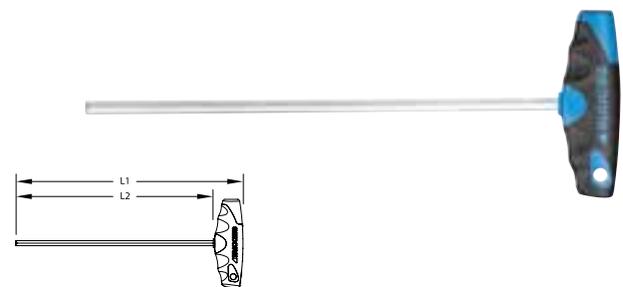


| ● AF | L <sub>1</sub> | L <sub>2</sub> | ⚖     | Code    | No.         |
|------|----------------|----------------|-------|---------|-------------|
| 1/8  | 152            | 125            | 0.101 | 2647354 | 2142T1/8AF  |
| 5/32 | 152            | 125            | 0.121 | 2647362 | 2142T5/32AF |
| 3/16 | 177            | 150            | 0.100 | 2647370 | 2142T3/16AF |
| 1/4  | 213            | 175            | 0.140 | 2647389 | 2142T1/4AF  |
| 5/16 | 213            | 175            | 0.221 | 2647397 | 2142T5/16AF |
| 3/8  | 238            | 200            | 0.201 | 2647400 | 2142T3/8AF  |

# DT 2142 HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > With 2 hexagons, same size each end
- > GEDORE vanadium steel 61CrSiV5, chromated

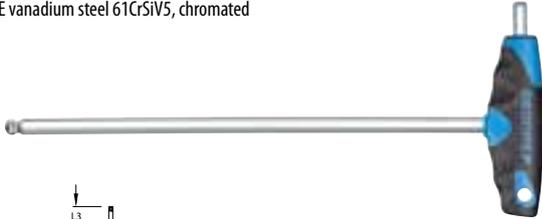


| mm  | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | g     | Code    | No.         |
|-----|----------------|----------------|----------------|-------|---------|-------------|
| 2   | 152            | 125            | 15             | 0.091 | 2488914 | DT 2142 2   |
| 2,5 | 152            | 125            | 15             | 0.071 | 2498596 | DT 2142 2,5 |
| 3   | 152            | 125            | 15             | 0.040 | 2498618 | DT 2142 3   |
| 4   | 152            | 125            | 15             | 0.080 | 2498626 | DT 2142 4   |
| 5   | 177            | 150            | 20             | 0.100 | 2502631 | DT 2142 5   |
| 6   | 188            | 150            | 20             | 0.120 | 2502658 | DT 2142 6   |
| 7   | 213            | 175            | 25             | 0.251 | 2505487 | DT 2142 7   |
| 8   | 213            | 175            | 25             | 0.180 | 2507447 | DT 2142 8   |
| 10  | 238            | 200            | 25             | 0.280 | 2507471 | DT 2142 10  |

# 2142 TX WRENCH KEY WITH 2GT-HANDLE

for recessed TORX® screws

- > With hanging hole
- > Chrome-vanadium steel, blade chrome-plated, tip gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| mm  | M         | mm   | L <sub>1</sub> | L <sub>2</sub> | g     | Code    | No.         |
|-----|-----------|------|----------------|----------------|-------|---------|-------------|
| T5  | M1,8      | 1,42 | 152            | 125            | 0.081 | 2509393 | 2142 TX T5  |
| T6  | M2        | 1,70 | 152            | 125            | 0.081 | 2511622 | 2142 TX T6  |
| T7  | M2,5      | 1,99 | 152            | 125            | 0.081 | 2511657 | 2142 TX T7  |
| T8  | M2,5      | 2,31 | 152            | 125            | 0.051 | 2513072 | 2142 TX T8  |
| T9  | M3        | 2,50 | 152            | 125            | 0.071 | 2513102 | 2142 TX T9  |
| T10 | M3 - M3,5 | 2,74 | 152            | 125            | 0.061 | 2513749 | 2142 TX T10 |
| T15 | M3,5 - M4 | 3,27 | 152            | 125            | 0.091 | 2516934 | 2142 TX T15 |
| T20 | M4 - M5   | 3,86 | 152            | 125            | 0.081 | 2519062 | 2142 TX T20 |
| T25 | M4,5 - M5 | 4,43 | 177            | 150            | 0.091 | 2519186 | 2142 TX T25 |
| T27 | M4,5 - M6 | 4,99 | 177            | 150            | 0.100 | 2521571 | 2142 TX T27 |
| T30 | M6 - M7   | 5,52 | 188            | 150            | 0.100 | 2521598 | 2142 TX T30 |
| T40 | M7 - M8   | 6,65 | 213            | 175            | 0.140 | 2521601 | 2142 TX T40 |
| T45 | M8 - M10  | 7,82 | 213            | 175            | 0.160 | 2521636 | 2142 TX T45 |
| T50 | M10       | 8,83 | 238            | 200            | 0.180 | 2521644 | 2142 TX T50 |

1500 CT2-DT 2142





>110

# DT 2143 KTX CRANKED SOCKET KEY WITH 2GT-HANDLE

for recessed TORX® screws



- > Working angle approx. 25°
- > With hanging hole
- > Chrome-vanadium steel, blades chrome-plated, tip phosphated
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

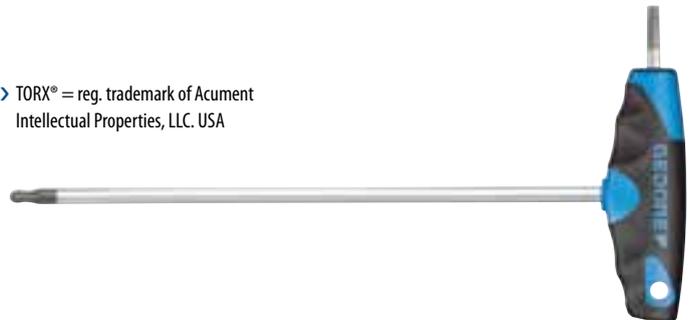

| mm  | M         | mm   | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | g     | Code    | No.             |
|-----|-----------|------|----------------|----------------|----------------|-------|---------|-----------------|
| T10 | M3 - M3,5 | 2,74 | 152            | 125            | 15             | 0.091 | 2647486 | DT 2143 KTX T10 |
| T15 | M3,5 - M4 | 3,27 | 152            | 125            | 15             | 0.081 | 2647494 | DT 2143 KTX T15 |
| T20 | M4 - M5   | 3,86 | 152            | 125            | 15             | 0.071 | 2647508 | DT 2143 KTX T20 |
| T25 | M4,5 - M5 | 4,43 | 177            | 150            | 20             | 0.121 | 2647516 | DT 2143 KTX T25 |
| T27 | M4,5 - M6 | 4,99 | 177            | 150            | 20             | 0.120 | 2647524 | DT 2143 KTX T27 |
| T30 | M6 - M7   | 5,52 | 188            | 150            | 25             | 0.140 | 2647532 | DT 2143 KTX T30 |
| T40 | M7 - M8   | 6,65 | 213            | 175            | 25             | 0.180 | 2647540 | DT 2143 KTX T40 |

## 2133 T NUT DRIVER WITH 2GT-HANDLE


- > With hanging hole
- > Head depth 25 mm
- > GEDORE vanadium steel 31CrV3, matt chrome-plated

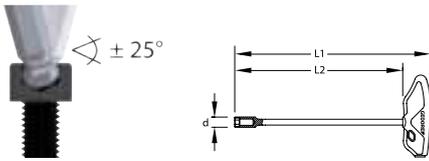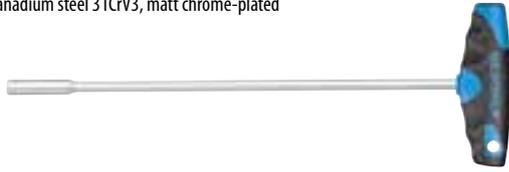

| Ø mm | L <sub>1</sub> | L <sub>2</sub> | d  |       | Code    | No.        |
|------|----------------|----------------|----|-------|---------|------------|
| 5.5  | 257            | 230            | 8  | 0.101 | 2647621 | 2133 T 5,5 |
| 6.0  | 257            | 230            | 9  | 0.101 | 2647648 | 2133 T 6   |
| 7.0  | 268            | 230            | 11 | 0.101 | 2647656 | 2133 T 7   |
| 8.0  | 268            | 230            | 12 | 0.180 | 2647664 | 2133 T 8   |
| 9.0  | 268            | 230            | 13 | 0.180 | 2647672 | 2133 T 9   |
| 10.0 | 268            | 230            | 14 | 0.180 | 2647680 | 2133 T 10  |
| 11.0 | 268            | 230            | 16 | 0.200 | 2647699 | 2133 T 11  |
| 12.0 | 268            | 230            | 17 | 0.220 | 2647702 | 2133 T 12  |
| 13.0 | 268            | 230            | 18 | 0.240 | 2647710 | 2133 T 13  |

## 42 DKEL - THE FIRST WITH TWO BALL ENDS

- > Two ball ends and an extra short angle side for working optimally in confined spaces
- > Positive or negative inclination produces a possible 50° angle of approach (+/- 25°) to the screw axis
- > Projecting hindrances can be got round with the two ball ends - rapid work is the outcome
- > The GEDORE vanadium steel 59CRV4 with its high manganese share ensures the screwdriver has that strength needed

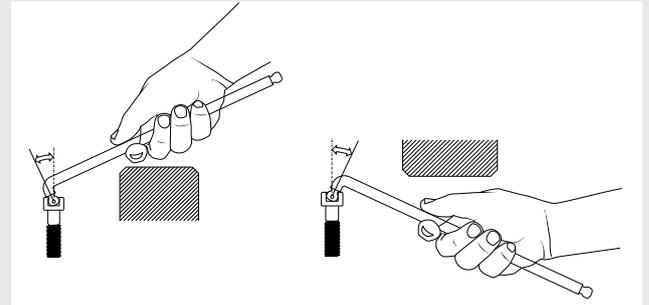

## DTT 42 HEXAGON ALLEN KEY

for in-hex screws

- > With 3 hexagons, same size each end
- > T-handle fixed



| Ø mm | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | Ø    |       | Code    | No.       |
|------|----------------|----------------|----------------|------|-------|---------|-----------|
| 3    | 150            | 75             | 30             | 5.0  | 0.042 | 1669540 | DTT 42 3  |
| 4    | 180            | 90             | 35             | 6.0  | 0.064 | 1669559 | DTT 42 4  |
| 5    | 180            | 90             | 35             | 7.0  | 0.092 | 1669567 | DTT 42 5  |
| 6    | 210            | 105            | 40             | 8.0  | 0.134 | 1669575 | DTT 42 6  |
| 8    | 250            | 125            | 50             | 9.5  | 0.224 | 1669583 | DTT 42 8  |
| 10   | 300            | 150            | 60             | 12.0 | 0.418 | 1669591 | DTT 42 10 |

## H 42 DKEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated




| Contents                        |       | Code    | No.          |
|---------------------------------|-------|---------|--------------|
| ● mm 42 DKEL 2 2,5 3 4 5 6 8 10 | 0.400 | 2797186 | H 42 DKEL-88 |

## 42 DKEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated

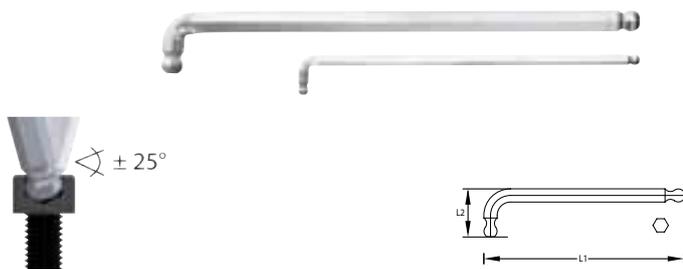

| mm  | L <sub>1</sub> | L <sub>2</sub> | kg    | Code    | No.         |
|-----|----------------|----------------|-------|---------|-------------|
| 1,5 | 89             | 7.5            | 0.003 | 2797062 | 42 DKEL 1,5 |
| 2   | 102            | 9.0            | 0.004 | 2797089 | 42 DKEL 2   |
| 2,5 | 115            | 10.0           | 0.006 | 2797097 | 42 DKEL 2,5 |
| 3   | 129            | 11.5           | 0.010 | 2797100 | 42 DKEL 3   |
| 4   | 144            | 14.5           | 0.018 | 2797119 | 42 DKEL 4   |
| 5   | 165            | 16.5           | 0.050 | 2797127 | 42 DKEL 5   |
| 6   | 186            | 19.0           | 0.060 | 2797135 | 42 DKEL 6   |
| 7   | 197            | 20.5           | 0.070 | 2797143 | 42 DKEL 7   |
| 8   | 205            | 22.0           | 0.090 | 2797151 | 42 DKEL 8   |
| 10  | 227            | 28.0           | 0.160 | 2797178 | 42 DKEL 10  |

## H 42 KEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with ball end

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 59CrV4, chromated



| Contents                     | kg    | Code    | No.         |
|------------------------------|-------|---------|-------------|
| mm 42 KEL 2 2,5 3 4 5 6 8 10 | 0.415 | 1523988 | H 42 KEL-88 |

## H 42 EL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                    | kg    | Code    | No.        |
|-----------------------------|-------|---------|------------|
| mm 42 EL 2 2,5 3 4 5 6 8 10 | 0.425 | 1505416 | H 42 EL-88 |

## 42 KEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with ball end

- > GEDORE vanadium steel 59CrV4, chrome-plated



| mm  | L <sub>1</sub> | L <sub>2</sub> | kg    | Code    | No.        |
|-----|----------------|----------------|-------|---------|------------|
| 1,5 | 91.5           | 15.5           | 0.003 | 1563556 | 42 KEL 1,5 |
| 2   | 102.0          | 18.0           | 0.004 | 6370090 | 42 KEL 2   |
| 2,5 | 114.5          | 20.5           | 0.006 | 6370170 | 42 KEL 2,5 |
| 3   | 129.0          | 23.0           | 0.010 | 6370250 | 42 KEL 3   |
| 4   | 144.0          | 29.0           | 0.019 | 6370330 | 42 KEL 4   |
| 5   | 165.0          | 33.0           | 0.033 | 6370410 | 42 KEL 5   |
| 6   | 186.0          | 38.0           | 0.053 | 6370680 | 42 KEL 6   |
| 7   | 197.0          | 41.0           | 0.076 | 1729241 | 42 KEL 7   |
| 8   | 208.0          | 44.0           | 0.103 | 6370760 | 42 KEL 8   |
| 10  | 234.0          | 50.0           | 0.179 | 6370840 | 42 KEL 10  |
| 12  | 262.0          | 57.0           | 0.287 | 6370920 | 42 KEL 12  |

## H 42 EL-88 A HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents                                        | kg    | Code    | No.          |
|-------------------------------------------------|-------|---------|--------------|
| AF 42 EL 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16" | 0.300 | 1543555 | H 42 EL-88 A |



## 42 EL (MM) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| ● mm | L <sub>1</sub> | L <sub>2</sub> | ⚖     | Code    | No.                  |
|------|----------------|----------------|-------|---------|----------------------|
| 2    | 102.0          | 18.0           | 0.004 | 6350810 | 42 EL 2 (5/64AF)     |
| 2,5  | 114.5          | 20.5           | 0.007 | 6351030 | 42 EL 2,5            |
| 3    | 129.0          | 23.0           | 0.010 | 6351110 | 42 EL 3              |
| 4    | 144.0          | 29.0           | 0.019 | 6351380 | 42 EL 4              |
| 5    | 165.0          | 33.0           | 0.033 | 6351460 | 42 EL 5              |
| 5,5  | 186.0          | 38.0           | 0.047 | 1543342 | 42 EL 7/32AF (5,5MM) |
| 6    | 186.0          | 38.0           | 0.054 | 6351540 | 42 EL 6              |
| 7    | 194.0          | 41.0           | 0.750 | 2977486 | 42 EL 7              |
| 8    | 208.0          | 44.0           | 0.104 | 6351620 | 42 EL 8              |
| 10   | 234.0          | 50.0           | 0.184 | 6351700 | 42 EL 10             |
| 12   | 262.0          | 57.0           | 0.293 | 6351890 | 42 EL 12             |
| 14   | 294.0          | 70.0           | 0.453 | 6351970 | 42 EL 14             |

## 42 EL (AF) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| ● AF | L <sub>1</sub> | L <sub>2</sub> | ⚖     | Code    | No.                  |
|------|----------------|----------------|-------|---------|----------------------|
| 5/64 | 102.0          | 18.0           | 0.004 | 6350810 | 42 EL 2 (5/64AF)     |
| 3/32 | 114.5          | 20.5           | 0.006 | 1543377 | 42 EL 3/32AF         |
| 1/8  | 129.0          | 23.0           | 0.011 | 1543318 | 42 EL 1/8AF          |
| 5/32 | 144.0          | 29.0           | 0.019 | 1543326 | 42 EL 5/32AF         |
| 3/16 | 165.0          | 33.0           | 0.030 | 1543334 | 42 EL 3/16AF         |
| 7/32 | 186.0          | 38.0           | 0.047 | 1543342 | 42 EL 7/32AF (5,5MM) |
| 1/4  | 197.0          | 41.0           | 0.065 | 1543369 | 42 EL 1/4AF          |
| 5/16 | 208.0          | 44.0           | 0.103 | 1543350 | 42 EL 5/16AF         |
| 3/8  | 234.0          | 50.0           | 0.167 | 1543385 | 42 EL 3/8AF          |
| 1/2  | 277.0          | 63.0           | 0.355 | 1543393 | 42 EL 1/2AF          |
| 9/16 | 294.0          | 70.0           | 0.475 | 1543407 | 42 EL 9/16AF         |

## PH 42-88 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                 | ⚖     | Code    | No.      |
|--------------------------|-------|---------|----------|
| ● mm 42 2,5 3 4 5 6 8 10 | 0.245 | 6352000 | PH 42-88 |

## H 42-10 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                           | ⚖     | Code    | No.     |
|------------------------------------|-------|---------|---------|
| ● mm 42 1,3 1,5 2 2,5 3 4 5 6 8 10 | 0.259 | 1505408 | H 42-10 |

# 42 (MM) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents                      |       | Code    | No.   |
|-------------------------------|-------|---------|-------|
| <b>mm 42 2 2,5 3 4 5 6 8</b>  | 0.144 | 6347510 | 42-07 |
| <b>mm 42 2,5 3 4 5 6 8 10</b> | 0.254 | 6349050 | 42-70 |

| Contents                          |       | Code    | No.   |
|-----------------------------------|-------|---------|-------|
| <b>mm 42 3 4 5 6 8 10 12 14</b>   | 0.716 | 6347780 | 42-08 |
| <b>mm 42 2 2,5 3 4 5 6 7 8 10</b> | 0.297 | 6347860 | 42-09 |

# 42 (MM) HEXAGON ALLEN KEY

for in-hex screws

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 12 mm, chrome-plated up from size 14 mm
- \* not standardised




| mm  | L <sub>1</sub> | L <sub>2</sub> |       | Code    | No.               |
|-----|----------------|----------------|-------|---------|-------------------|
| 0,7 | 33.0           | 7.0            | 0.001 | 6342200 | 42 0,7            |
| 0,9 | 33.0           | 11.0           | 0.001 | 6342390 | 42 0,9            |
| 1,3 | 41.0           | 13.0           | 0.001 | 6342470 | 42 1,3            |
| 1,5 | 46.5           | 15.5           | 0.001 | 6340260 | 42 1,5            |
| 2   | 52.0           | 18.0           | 0.002 | 6340340 | 42 2 (5/64AF)     |
| 2,5 | 58.5           | 20.5           | 0.004 | 6340420 | 42 2,5            |
| 3   | 66.0           | 23.0           | 0.006 | 6340500 | 42 3              |
| 4   | 74.0           | 29.0           | 0.011 | 6340690 | 42 4              |
| 5   | 85.0           | 33.0           | 0.019 | 6340770 | 42 5              |
| 5,5 | *              | 82.0           | 0.022 | 6344840 | 42 7/32AF (5,5MM) |
| 6   |                | 96.0           | 0.031 | 6340850 | 42 6              |
| 7   | *              | 102.0          | 0.044 | 6340930 | 42 7              |

| mm | L <sub>1</sub> | L <sub>2</sub> |       | Code    | No.   |
|----|----------------|----------------|-------|---------|-------|
| 8  | 108.0          | 44.0           | 0.061 | 6341070 | 42 8  |
| 9  | *              | 114.0          | 0.081 | 6341150 | 42 9  |
| 10 | 122.0          | 50.0           | 0.106 | 6341230 | 42 10 |
| 12 | 137.0          | 57.0           | 0.169 | 6341310 | 42 12 |
| 14 | 154.0          | 70.0           | 0.266 | 6341580 | 42 14 |
| 17 | 177.0          | 80.0           | 0.430 | 6341660 | 42 17 |
| 19 | 199.0          | 89.0           | 0.602 | 6341740 | 42 19 |
| 22 | 222.0          | 102.0          | 0.907 | 6341820 | 42 22 |
| 24 | 248.0          | 114.0          | 1.211 | 6341900 | 42 24 |
| 27 | 277.0          | 127.0          | 1.711 | 6342550 | 42 27 |
| 30 | 315.0          | 142.0          | 2.423 | 6342630 | 42 30 |
| 32 | 347.0          | 157.0          | 3.010 | 6342710 | 42 32 |

# H 42-88 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated

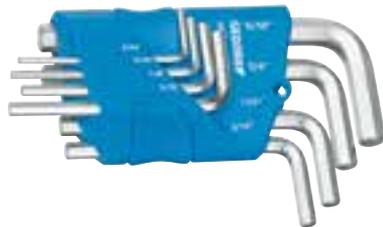

| Contents                                            |       | Code    | No.       |
|-----------------------------------------------------|-------|---------|-----------|
| <b>AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"</b> | 0.172 | 1505424 | H 42-88 A |

# 42 (AF) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents                                             |       | Code    | No.     |
|------------------------------------------------------|-------|---------|---------|
| <b>AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4"</b>          | 0.103 | 6348750 | 42-07 A |
| <b>AF 1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16"</b>       | 0.731 | 6348830 | 42-08 A |
| <b>AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"</b> | 0.257 | 6348910 | 42-09 A |

## 42 (AF) HEXAGON ALLEN KEY

for in-hex screws

> GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 1/2", chrome-plated up from size 9/16"

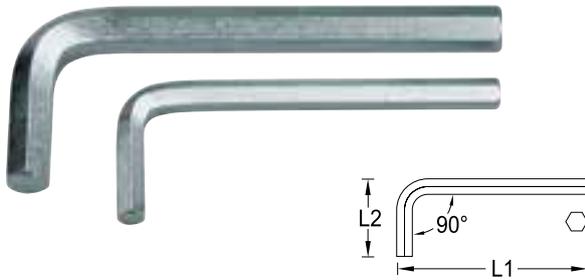

| ● "AF | L <sub>1</sub> | L <sub>2</sub> | ⚖ kg  | Code    | No.               |
|-------|----------------|----------------|-------|---------|-------------------|
| 3/64  | 41.0           | 13.0           | 0.002 | 6342120 | 42 3/64AF         |
| 1/16  | 46.5           | 15.5           | 0.002 | 6342040 | 42 1/16AF         |
| 3/32  | 56.5           | 20.5           | 0.004 | 6344330 | 42 3/32AF         |
| 5/64  | 52.0           | 18.0           | 0.002 | 6340340 | 42 2 (5/64AF)     |
| 1/8   | 60.0           | 23.0           | 0.006 | 6344410 | 42 1/8AF          |
| 5/32  | 67.0           | 26.0           | 0.010 | 6344680 | 42 5/32AF         |
| 3/16  | 73.0           | 30.0           | 0.015 | 6344760 | 42 3/16AF         |
| 7/32  | 82.0           | 32.0           | 0.022 | 6344840 | 42 7/32AF (5,5MM) |
| 1/4   | 92.0           | 36.5           | 0.035 | 6344920 | 42 1/4AF          |
| 5/16  | 102.0          | 43.0           | 0.059 | 6345060 | 42 5/16AF         |
| 3/8   | 115.0          | 49.0           | 0.094 | 6345140 | 42 3/8AF          |
| 1/2   | 142.0          | 61.0           | 0.205 | 6345220 | 42 1/2AF          |
| 9/16  | 154.0          | 66.0           | 0.274 | 6345300 | 42 9/16AF         |
| 5/8   | 168.0          | 76.0           | 0.376 | 6345490 | 42 5/8AF          |
| 3/4   | 199.0          | 89.0           | 0.309 | 6345570 | 42 3/4AF          |


## 42 Z HEXAGON ALLEN KEY

with pilot, for in-hex screws

> Acc. to DIN 6911

> Chrome-vanadium steel, zinc-plated

\* not standardised

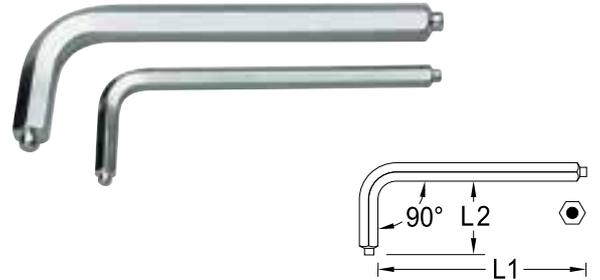

| ● mm | L <sub>1</sub> | L <sub>2</sub> | ⚖ kg  | Code    | No.     |
|------|----------------|----------------|-------|---------|---------|
| 3    | 63             | 20             | 0.006 | 6342980 | 42 Z 3  |
| 4    | 70             | 25             | 0.010 | 6343010 | 42 Z 4  |
| 5    | 80             | 28             | 0.019 | 6343280 | 42 Z 5  |
| 6    | 90             | 32             | 0.031 | 6343360 | 42 Z 6  |
| 7    | *              | 34             | 0.042 | 6343440 | 42 Z 7  |
| 8    | 100            | 36             | 0.058 | 6343520 | 42 Z 8  |
| 10   | 112            | 40             | 0.100 | 6343600 | 42 Z 10 |
| 12   | 125            | 45             | 0.162 | 6343790 | 42 Z 12 |
| 14   | 140            | 56             | 0.254 | 6343870 | 42 Z 14 |
| 17   | 160            | 63             | 0.418 | 6343950 | 42 Z 17 |
| 19   | 180            | 70             | 0.584 | 6344090 | 42 Z 19 |

## S 42-09 A HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release

> GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                                            | ⚖ kg  | Code    | No.       |
|-----------------------------------------------------|-------|---------|-----------|
| ● "AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8" | 0.273 | 6348160 | S 42-09 A |

## S 42-07 HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release

> GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents              | ⚖ kg  | Code    | No.     |
|-----------------------|-------|---------|---------|
| ● mm 42 2,5 3 4 5 6 8 | 0.162 | 6347430 | S 42-07 |

## SCL 42-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                     |       | Code    | No.       |
|------------------------------|-------|---------|-----------|
| ● <b>mm</b> 2,5 3 4 5 6 8 10 | 0.360 | 6347350 | SCL 42-70 |

## SCL 42 K-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > Execution K with ball end
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                     |       | Code    | No.         |
|------------------------------|-------|---------|-------------|
| ● <b>mm</b> 2,5 3 4 5 6 8 10 | 0.361 | 6371140 | SCL 42 K-70 |

## SCL 42-90 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents                                                 |       | Code    | No.         |
|----------------------------------------------------------|-------|---------|-------------|
| ● <b>"AF</b> 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4" | 0.260 | 6354800 | SCL 42-90 A |

## SCL 43 TX-80 CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In robust metal clip
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents                                |       | Code    | No.          |
|-----------------------------------------|-------|---------|--------------|
| ● <b>T9 T10 T15 T20 T25 T27 T30 T40</b> | 0.286 | 6346460 | SCL 43 TX-80 |

## 42 X CRANKED ALLEN SOCKET SCREWDRIVER

for multi-point screws XZN

- > Acc. to DIN 65253, tips acc. to DIN 2325
- > GEDORE vanadium steel 50CrV4, chromated




|      |  | L <sub>1</sub> | L <sub>2</sub> |       | Code    | No.     |
|------|--|----------------|----------------|-------|---------|---------|
| M 4  |  | 63             | 20             | 0.009 | 1531212 | 42 X 4  |
| M 5  |  | 75             | 30             | 0.015 | 6350060 | 42 X 5  |
| M 6  |  | 86             | 34             | 0.025 | 6350140 | 42 X 6  |
| M 8  |  | 98             | 40             | 0.043 | 6350220 | 42 X 8  |
| M 10 |  | 110            | 46             | 0.085 | 6350300 | 42 X 10 |
| M 12 |  | 124            | 52             | 0.124 | 6350490 | 42 X 12 |
| M 14 |  | 139            | 59             | 0.191 | 6350570 | 42 X 14 |
| M 16 |  | 156            | 72             | 0.308 | 6350650 | 42 X 16 |
| M 18 |  | 178            | 81             | 0.333 | 6350730 | 42 X 18 |

## 43 CRANKED SOCKET KEY

for multi-spline screws RIBE®

- > GEDORE vanadium steel 50CrV4, chromated
- > RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach, Germany

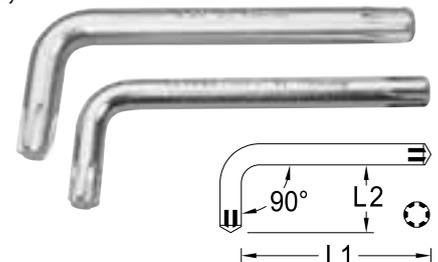

|      |  | L <sub>1</sub> | L <sub>2</sub> |       | Code    | No.   |
|------|--|----------------|----------------|-------|---------|-------|
| M 5  |  | 71             | 25             | 0.016 | 6352270 | 43 5  |
| M 6  |  | 80             | 28             | 0.025 | 6352350 | 43 6  |
| M 8  |  | 90             | 32             | 0.049 | 6352430 | 43 8  |
| M 10 |  | 100            | 36             | 0.084 | 6352510 | 43 10 |
| M 12 |  | 112            | 40             | 0.135 | 6352780 | 43 12 |
| M 14 |  | 125            | 45             | 0.203 | 6352860 | 43 14 |

## H 43 TX

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents                               | kg    | Code    | No.        |
|----------------------------------------|-------|---------|------------|
| 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40 | 0.120 | 1531417 | H 43 TX-09 |
| 43 TX T9 T10 T15 T20 T25 T27 T30 T40   | 0.129 | 1531425 | H 43 TX-88 |
| 43 TX T10 T15 T20 T25 T27 T30 T40 T45  | 0.168 | 1531433 | H 43 TX-08 |

## 43 TX-09

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue PVC wallet
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents                               | kg    | Code    | No.      |
|----------------------------------------|-------|---------|----------|
| 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40 | 0.115 | 6360960 | 43 TX-09 |

## 43 TX

### CRANKED SOCKET KEY

for recessed TORX® screws

- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⊕   | M         | mm    | L <sub>1</sub> | L <sub>2</sub> | kg    | Code    | No.       |
|-----|-----------|-------|----------------|----------------|-------|---------|-----------|
| T6  | M2        | 1,69  | 42             | 16             | 0.003 | 6363550 | 43 TX T6  |
| T7  | M2,5      | 1,99  | 48             | 16             | 0.003 | 6363630 | 43 TX T7  |
| T8  | M2,5      | 2,31  | 48             | 16             | 0.004 | 6363710 | 43 TX T8  |
| T9  | M3        | 2,50  | 48             | 16             | 0.004 | 6363980 | 43 TX T9  |
| T10 | M3 - M3,5 | 2,74  | 51             | 17             | 0.005 | 6364010 | 43 TX T10 |
| T15 | M3,5 - M4 | 3,27  | 54             | 18             | 0.006 | 6364280 | 43 TX T15 |
| T20 | M4 - M5   | 3,86  | 57             | 19             | 0.008 | 6364360 | 43 TX T20 |
| T25 | M4,5 - M5 | 4,43  | 60             | 20             | 0.010 | 6364440 | 43 TX T25 |
| T27 | M4,5 - M6 | 4,99  | 64             | 21             | 0.016 | 6364520 | 43 TX T27 |
| T30 | M6 - M7   | 5,52  | 70             | 24             | 0.022 | 6364600 | 43 TX T30 |
| T40 | M7 - M8   | 6,65  | 76             | 26             | 0.031 | 6364790 | 43 TX T40 |
| T45 | M8 - M10  | 7,82  | 83             | 29             | 0.046 | 6364870 | 43 TX T45 |
| T50 | M10       | 8,83  | 95             | 32             | 0.060 | 6364950 | 43 TX T50 |
| T55 | M12       | 11,22 | 108            | 35             | 0.122 | 6365090 | 43 TX T55 |
| T60 | M14       | 13,25 | 120            | 38             | 0.187 | 6365170 | 43 TX T60 |

## H 43 KTX-07

### CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > With ball end
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents                           | kg    | Code    | No.         |
|------------------------------------|-------|---------|-------------|
| 43 KTX T10 T15 T20 T25 T27 T30 T40 | 0.169 | 1531441 | H 43 KTX-07 |

## 43 KTX CRANKED SOCKET KEY

for recessed TORX® screws, with ball end

- > Working angle approx. 25°
- > Chrome-vanadium steel, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⊕   | mm        | mm   | L <sub>1</sub> | L <sub>2</sub> | kg    | Code    | No.        |
|-----|-----------|------|----------------|----------------|-------|---------|------------|
| T10 | M3 - M3,5 | 2,74 | 73             | 17             | 0.006 | 6367110 | 43 KTX T10 |
| T15 | M3,5 - M4 | 3,27 | 83             | 17             | 0.009 | 6367380 | 43 KTX T15 |
| T20 | M4 - M5   | 3,86 | 94             | 18             | 0.012 | 6367460 | 43 KTX T20 |
| T25 | M4,5 - M5 | 4,43 | 96             | 18             | 0.015 | 6367540 | 43 KTX T25 |
| T27 | M4,5 - M6 | 4,99 | 106            | 20             | 0.024 | 6367620 | 43 KTX T27 |
| T30 | M6 - M7   | 5,52 | 119            | 24             | 0.033 | 6367700 | 43 KTX T30 |
| T40 | M7 - M8   | 6,65 | 132            | 26             | 0.049 | 6367890 | 43 KTX T40 |

## 708 TORX® GAUGE

- > Easy identification of TORX® sizes, internal E4-E16, external T10-T60
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents    | kg    | Code    | No. |
|-------------|-------|---------|-----|
| ⊕ E4 - E16  | 0.022 | 1394428 | 708 |
| ⊕ T10 - T60 |       |         |     |

## 173 CRANKED SCREWDRIVER

for slotted head screws

- > Acc. to DIN 5200, blade tips acc. to DIN ISO 2380-2
- > Chrome-vanadium steel, matt nickel-plated




| mm   | mm  | mm  | kg    | Code    | No.     |
|------|-----|-----|-------|---------|---------|
| 3.5  | 0.6 | 90  | 0.010 | 6437180 | 173 3,5 |
| 4.0  | 0.8 | 100 | 0.013 | 6437850 | 173 4   |
| 5.5  | 1.0 | 125 | 0.025 | 6436100 | 173 5,5 |
| 8.0  | 1.2 | 150 | 0.050 | 6436370 | 173 8   |
| 10.0 | 1.6 | 175 | 0.087 | 6437930 | 173 10  |
| 12.0 | 2.0 | 200 | 0.127 | 6436530 | 173 12  |

## 174 CRANKED SCREWDRIVER

for cross-head screws PH

- > Acc. to DIN 5208, tips acc. to DIN ISO 8764-1 PH
- > Chrome-vanadium steel, matt nickel-plated

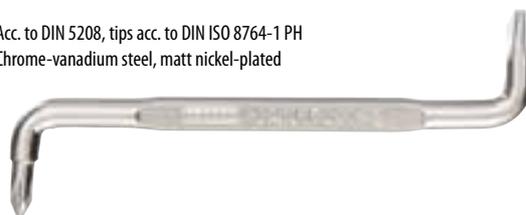

| ⊕ PH | mm       | mm  | kg    | Code    | No.   |
|------|----------|-----|-------|---------|-------|
| 1-2  | M2 - M5  | 100 | 0.029 | 6436880 | 174 1 |
| 3-4  | M6 - M10 | 200 | 0.121 | 6436960 | 174 3 |

## VARIOUS

## 149 MAGNETIZER AND DEMAGNETIZER

- > Magnetizes or demagnetizes screwdrivers, tweezers and similar tools made from steel
- > Blue housing, made from high-quality plastic, unbreakable, cadmium-free



| L  | H  | W  | kg    | Code    | No. |
|----|----|----|-------|---------|-----|
| 52 | 26 | 50 | 0.088 | 6416500 | 149 |

## Ω 156 S SQUARE BLADED AWL

- > Blue handle with hanging hole
- > Blade bright nickel-plated



| mm  | mm  | kg    | Code    | No.   |
|-----|-----|-------|---------|-------|
| 100 | 200 | 0.084 | 6424520 | 156 S |