



Side Cutters / End Cutting Nippers

8313
SIDE CUTTER

for plastic

- > Without cutting edge bevel, for flush cutting of plastic parts or similar soft materials
- > Black, cutting faces flat-ground, with compression spring for automatic opening
- > With blue dipped non-slip handles (TL)


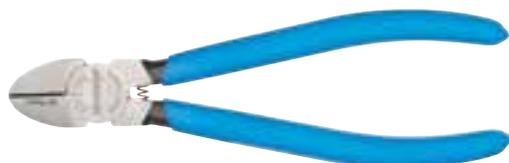


L	L ₃	W ₃	T ₁		Code	No.
125	16.0	17.0	8.5	0.116	6745910	8313-125 TL
140	18.5	18.5	9.5	0.131	6746050	8313-140 TL
160	19.0	22.0	10.0	0.184	6746130	8313-160 TL

8314
SIDE CUTTER

Swedish pattern


- > Acc. to DIN ISO 5749
- > With slender head - ideal for confined spaces
- > Induction-hardened precision cutting edges, hardness 63 - 65 HRC
- > For medium-hard wire, 1.6 mm
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles

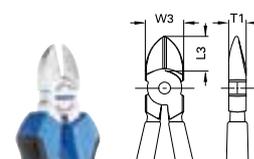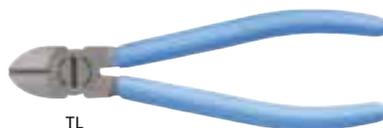

L	L ₃	W ₃	T ₁	Ø		Code	No.
125	16.0	17.0	8.5	1,6	0.146	6742300	8314-125 JC
125	16.0	17.0	8.5	1,6	0.107	6740870	8314-125 TL
140	18.5	18.5	9.5	1,6	0.176	6742730	8314-140 JC
140	18.5	18.5	9.5	1,6	0.129	6740950	8314-140 TL
160	19.0	22.0	10.0	1,6	0.230	6743380	8314-160 JC
160	19.0	22.0	10.0	1,6	0.173	6741090	8314-160 TL

8315
ELECTRICIANS' SIDE CUTTER

- > Double-function electricians' side cutters: for cutting and stripping wire
- > Stripping notches for single- and multi-core wire, 1.5 mm² and 2.5 mm² conductor cross-section
- > Induction-hardened precision cutting edges, hardness 61 - 63 HRC
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles

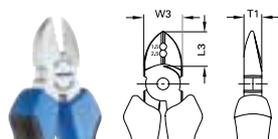


L	L ₃	W ₃	T ₁	mm ²		Code	No.
160	19	22	10	1,5 / 2,5	0.235	1396722	8315-160 JC

8314-180
POWER SIDE CUTTER

Swedish pattern

- > Convex handle shape for a high force build-up*
- > Acc. to DIN ISO 5749
- > With slender head - ideal for confined spaces
- > Induction-hardened precision cutting edges, hardness 63 - 65 HRC
- > For medium-hard wire, 1.6 mm
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- * Crowned surfaces/handles - i.e. which are hardly rounded - prevent unfavourable, punctual peak forces. As a result, the force is evenly spread across your hand.

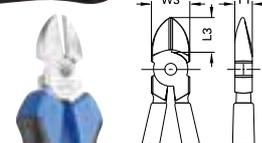

L	L ₃	W ₃	T ₁	Ø		Code	No.
185	25.0	26.0	11.0	1,6	0.300	2910934	8314-180 JC
185	25.0	26.0	11.0	1,6	0.243	2910926	8314-180 TL



- > Power pliers: The effort required in using them is down 35 % on account of the pivot transferred to the front and the resulting lengthened lever.
- > High-grade 2-component handles with finger protection enable work to be done ergonomically and to the exclusion of tiredness




8316 POWER SIDE CUTTER

- > Acc. to DIN ISO 5749
- > Good lever action for easy cutting
- > For hard wire/piano wire
- > Max. cutting capacity \varnothing 1.4 - 2.0 mm

- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles




JC

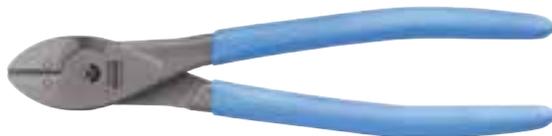

TL

Inductively hardened cutting edges (63 - 65 HRC) ensure constant cutting power over a long time span.

Maximum cutting performance yet with a low level of effort expended thanks to an optimum interaction of cutting geometry, eccentric rivet bearing and ergonomic handle design.



8316 POWER SIDE CUTTER

American pattern

L	L ₂	W ₃	T ₁	∅		Code	No.
140	17.0	22.0	9.5	1,4	0.175	6744190	8316-140 JC
140	17.0	22.0	9.5	1,4	0.146	6711930	8316-140 TL
160	19.0	24.5	10.0	1,6	0.236	6744510	8316-160 JC
160	19.0	24.5	10.0	1,6	0.195	6712070	8316-160 TL

L	L ₂	W ₃	T ₁	∅		Code	No.
180	22.6	26.0	11.0	1,8	0.265	1439588	8316-180 JC
180	22.6	26.0	11.0	1,8	0.225	1439596	8316-180 TL
200	22.0	28.0	11.0	2,0	0.340	6745080	8316-200 JC
200	22.0	28.0	11.0	2,0	0.270	6712150	8316-200 TL



8318

LEVER-ACTION SIDE CUTTER

- > For hard wire/piano wire 1.6 mm
- > Double-jointed for maximum cutting performance
- > Head and joint made from special steel, head gun-metal finished
- > Handles chrome-plated and PVC coated



Ø	↳ mm ↳	↳"inch"↳	⚖️ kg	Code	No.
1,6	160	6.1/2	0.213	6745590	8318-160 TL

8370

LEVER-ACTION END CUTTING NIPPER

- > Acc. to DIN ISO 5748
- > For hard wire/piano wire - values see table
- > Double-lever mechanism for maximum cutting performance
- > C65 tool steel, fully forged
- > GEDORE blue varnished
- * not standardised




Ø	↳ mm ↳	↳"inch"↳	⚖️ kg	Code	No.
2	180	7	0.460	6750830	8370-180
2	210	8.1/2	0.610	6751050	8370-210
2,5	*	235	9.1/4	6751210	8370-235

8367

END CUTTING NIPPER POWER

- > Acc. to DIN ISO 5748
- > Good lever action for easy cutting
- > Induction-hardened precision cutting edges, hardness 63 - 65 HRC
- > For hard wire/piano wire 1.6 mm
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles

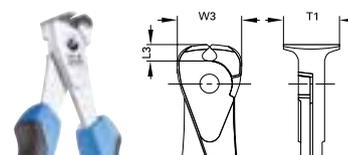


L	L ₂	W ₂	T ₁	Ø	⚖️ kg	Code	No.
160	6.9	27	23.5	1,6	0.254	6749150	8367-160 JC
160	6.9	27	23.5	1,6	0.242	6712230	8367-160 TL

8380

TOWER PINCER

- > Heavy-duty wire braid and mesh-cutting pincers
- > Acc. to DIN ISO 9242, Form A
- > Induction-hardened precision cutting edges, hardness 61 - 63 HRC
- > For medium-hard wire, 1.6 mm
- > Heads ground, steel-grey, with blue dipped non-slip handles (TL)
- > Geometrically optimised head and handle areas for ergonomic use
- > In high-quality tool steel




L	L ₂	W ₂	T ₁	⚖️ kg	Code	No.
230	16	31	22	0.358	6752020	8380-225 TL
250	16	35	25	0.423	6752100	8380-250 TL
280	16	35	25	0.541	6752290	8380-280 TL

8381

PINCER

- > Standard heavy-duty pincers
- > Acc. to DIN ISO 9243, Form A
- > Induction-hardened precision cutting edges, hardness 61 - 63 HRC
- > Heads ground, steel-grey, with blue dipped non-slip handles (TL)
- > In high-quality tool steel



L	L ₂	W ₂	T ₁	⚖️ kg	Code	No.
160	21.0	48	20	0.258	6752370	8381-160 TL
180	21.0	50	23	0.362	6751800	8381-180 TL
200	23.5	55	26	0.442	6751990	8381-200 TL
225	23.5	55	25	0.514	6752450	8381-225 TL
250	23.5	58	27	0.586	6752530	8381-250 TL