

Safety strap cutter

One-handed cutting of strong steel straps

YouTube



Secure – with just one hand!

With the D123S BESSEY offers you the unique, single-handed operation steel strap cutter, which can even cut through 32 x 1 mm hardened steel straps. This means that over half of all commonly-used packaging straps can be cut, for example, steel strapping on wooden crates. With an overall length of just 260 mm it is very short and so light and easy to handle. The cutter head is flat formed and can be easily slid underneath tightly tensioned straps. During the cutting process a retainer holds the strap tightly and thus prevents it from springing up dangerously. If you are looking for safe handling using only one hand, then the D123S is unbeatable – simply peerless!

Your benefits at a glance:

1 Tempered cutter head

The tempered fine-cast cutter head cuts steel straps up to 32 x 1 mm. The cutting edge is induction hardened for long service life.

2 Strap holding element

The strap holding element, made of polymer material, firmly holds the strap down while it is cut, preventing it from snapping upwards. For your safety.

3 Compound leverage

Compound leverage reduces the effort required considerably. This improves productivity while reducing hand fatigue for the worker.

4 Ergonomic handle

The plastic grips on the ergonomically designed handles have soft cushion inserts that further reduce hand fatigue for the worker. The soft cushion inserts also keep the hand from slipping on the grips.

Steel strap cutters

Safety strap cutter with compound leverage

N ^o	← a →		← b →		kg	qty.	VD0002
	mm	"	mm	"			
D123S	260	10 ¼	38	1 ½	0.55	5	
D123S-SB	260	10 ¼	38	1 ½	0.60	5	



- Cutting of steel straps up to 32 x 1 mm with just one hand
- Holds banding tightly during cutting to prevent banding from springing up
- ERGO-handle for increased comfort – reduced hand fatigue!

Steel strap cutter


N ^o	← a →		← b →		kg	qty.	VD0002
	mm	"	mm	"			
D122N	225	9	31	1 ¼	0.40	5	



- The lower holder prevents band ends from springing up
- For band width up to 25 mm, band thickness up to 0.6 mm
- Flat lower jaw easily slips under taut banding
- Painted handles

Steel strap cutter

N ^o	← a →		← b →		kg	qty.	VD0002
	mm	"	mm	"			
D122A	260	10 ¼	30	1 ⅜	0.42	5	
D122A-SB	260	10 ¼	30	1 ⅜	0.43	5	

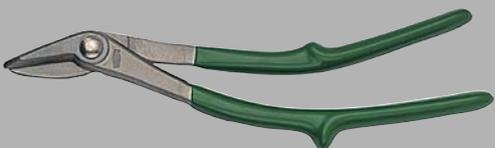

- Flat lower jaw easily slips under taut banding
- High price to performance ratio
- For band width up to 25 mm, band thickness up to 0.6 mm
- PVC dipped handles