

CRIMPING PLIERS

97 00 Crimp Grip Pliers



97 00 215 A




- for solder-free electrical connections
- quick release lever
- high contact pressure with minimum handforce using toggle lever transmission
- reproducible crimping quality with high tensile strength because of zero point lock
- adjustable crimping pressure
- Special steel, high-strength

Article No.	EAN 4003773-	↔ mm			Pliers	Applications	Capacity mm ²	AWG	⚖ g
97 00 215 A	006497	215			burnished	insulated terminals and plug connectors	0.5 - 6	20 - 10	520

97 2 Crimping Pliers



97 21 215

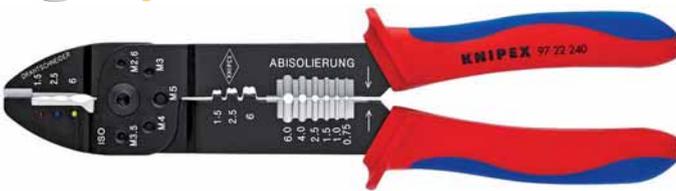

97 22 240



- for cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- with threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- bolted joint for higher stability and even movement
- Special steel, high-strength



Article No.	EAN 4003773-	↔ mm			Pliers	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 21 215	019688	230			burnished	with multi-component grips	insulated terminals and plug connectors	0.75 - 6	18 - 10	224
97 21 215 B	019695	230			burnished	with multi-component grips	non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 2.5	20 - 13	290
97 21 215 C	019701	230			burnished	with multi-component grips	non-insulated terminals and plug connectors	0.5 - 6	20 - 10	222
97 22 240	070726	240			black lacquered	with multi-component grips	insulated terminals and plug connectors	0.75 - 6	18 - 10	300
							non-insulated open plug-type connectors (plug width 6.3 mm)	0.5 - 6	20 - 10	

CRIMPING PLIERS

97 32 Crimping Pliers



- for cutting cables, stripping wire and crimping insulated and non-insulated terminals and connectors
- with threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- Special steel, high-strength


Article No.	EAN 4003773-	↔ mm		Pliers	Handles	Applications	Capacity mm ²	AWG	⚖ g
97 32 225	019718	225		burnished	with plastic grips	insulated terminals and plug connectors	0.5 - 6	20 - 10	240
						non-insulated terminals and plug connectors	0.5 - 2.5	20 - 13	

97 40 Insertion tool for LSA-Plus and identical



97 40 10

- tool for putting on boards, sockets and fields
- pushing down and cutting in one operation
- for UTP and STP cables, conductor 0.4 - 0.8 mm dia.
- with integrated pulling hook and release blade
- housing: plastic, impact-proof

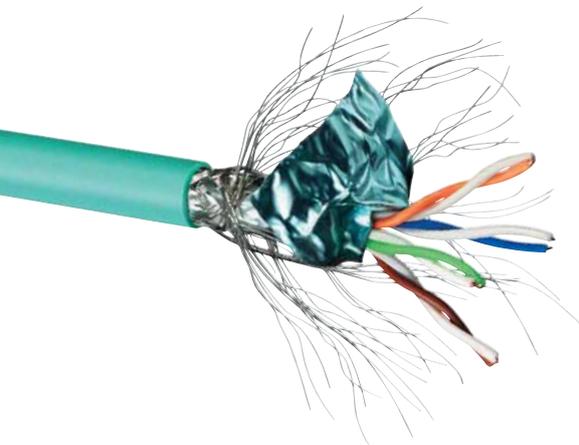

Putting down and cutting the cable in one operation



With integrated pulling hook

Article No.	EAN 4003773-	↔ mm	Head	Applications	Capacity Ø mm	⚖ g
97 40 10	044895	175	burnished	UTP- and STP-cables, LSA-Plus and identical	0.4 - 0.8	100