

# CRIMPING PLIERS

97  
52

## KNIPEX PreciForce® Crimping Pliers



97 52 30



97 52 33



97 52 34




97 52 36



97 52 38

For daily crimping applications, the specialist likes crimping pliers that work precisely and reliably. In addition, they should be light, comfortable to use, robust and reasonably priced: PreciForce®.

- repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles
- Chrome vanadium electric steel in special quality, oil-hardened

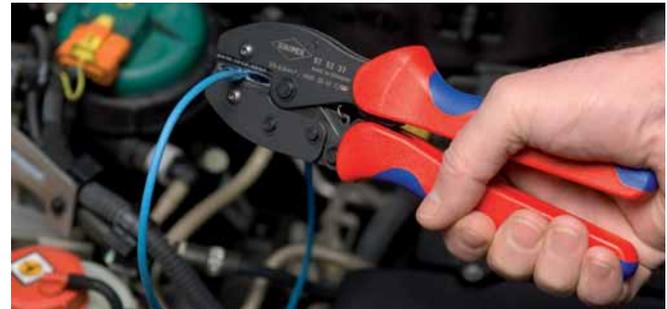

97 52 37

Article No.	EAN 4003773-	↔ mm		Applications	Capacity mm <sup>2</sup>	AWG	△ g	
97 52 30	051855	220		compression joints according to DIN 46267	1.5 - 4 (6 - 10)	15 - 11 10 / 7	477	
97 52 33	051862	220		non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 - 1 1.5 - 2.5 4 - 6 10	20 - 7	478	
97 52 34	051879	220		non-insulated open plug type connectors (plug width 2,8 + 4,8 mm)	2.8 mm: 0.1 - 0.25 2.8 mm: 0.5 - 1 4.8 mm: 0.5 - 1 4.8 mm: 1.5 - 2.5	27 - 13	483	
97 52 35	051886	220		non-insulated open plug type connectors (plug width 4,8 + 6,3 mm)	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	494	
97 52 36	051893	220		insulated terminals + plug connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	487	
97 52 37	063193	220		heat shrinkable sleeve connectors	0.5 - 1 1.5 - 2.5 4 - 6	20 - 10	478	
97 52 38	051909	220		insulated and non-insulated end sleeves (ferrules)	0.25 - 0.75 1 - 1.5 2.5 4 6	23 - 10	493	
97 52 50	051916	220		COAX-, BNC- and TNC-connectors for RG 58; 174; 188; 316			498	
97 49 94	030997	Locator for 97 49 04 / 97 52 04 / 97 52 34						
97 49 95	031000	Locator for 97 49 05 / 97 52 05 / 97 52 35						