

71


KNIPEX CoBolt® Compact Bolt Cutters

DIN ISO 5743

Clever muscle man



71 01 200

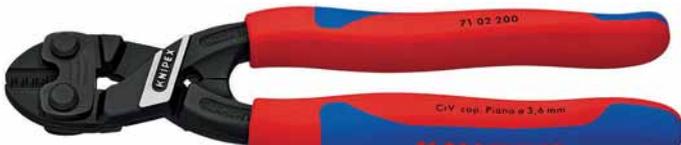

71 02 200



71 12 200



71 22 200



71 41 200



60 % less effort required compared to conventional high-leverage diagonal cutters

The ingenious lever-action mechanism ensures an extremely favourable lever ratio with very little friction. The cutting force is about 20 times higher than the hand force applied.

Improved cutting performance

Micro-structured cutting edge allows easy cutting of large cross-sections

With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm

- precision cutting edges for soft and hard wire as well as piano wire
- cuts components like bolts, nails, rivets, etc. up to 5.2 mm dia.
- exceptional cutting performance with minimum effort because of unsurpassedly effective lever action design
- cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- Chrome vanadium heavy-duty steel, forged, oil-hardened

71 02 200

with slim two-colour multi-component sleeves without collar for better handling and easier transport; with large contact surface on the handles for better allotment of pressure and more comfort at work

71 12 200 / 71 22 200 / 71 32 200

opening spring and locking device are integrated in the handles also for comfortable work and protected transport

Style 2

20° angled head with single-sided joint bar and diagonal cutting edge for flush cutting; with space for gripping


Style 3

the recess in the blade allows easier cutting of thicker wires, e.g. for anchor bolts in false ceilings



Style 4

the recess in the blade allows easier cutting of thicker wires, e.g. for anchor bolts in false ceilings; 20° angled head with single-sided joint bar and diagonal cutting edge for flush cutting; with space for gripping

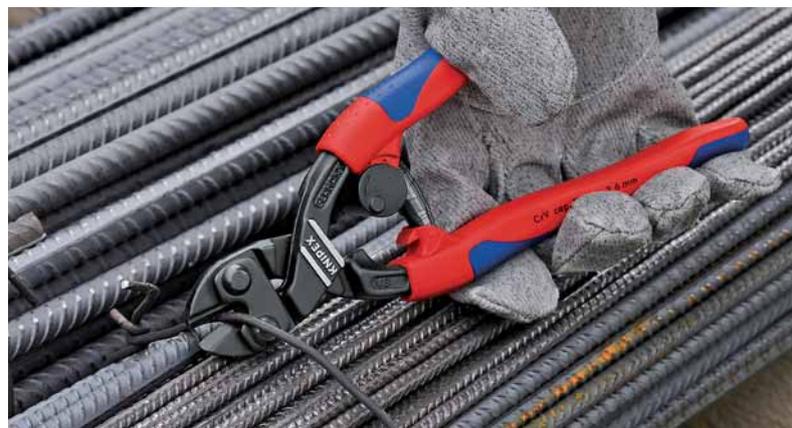

CUTTING PLIERS

Micro-structured cutting edge allows easy cutting of large cross-sections

71 01/02/12 200



With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm

71 01/02/12 200 and 71 31/32 200



CoBolt®



71 31/32/41 200: The cutting edge recess near the joint holds thicker wires in a favourable cutting position (optimum lever ratio). The re-positioning that is usual with bolt cutters is not needed here.



71 21/22/41 200: 20° angled head with single-sided joint bar and diagonal cutting edge for flush cutting; with space for gripping

Article No.	EAN 4003773-	↔ mm	Style	Pliers	Handles	Cutting capacities				g
						Ø mm	Ø mm	Ø mm	Ø mm	
71 01 200	033165	200	0	black atramentized	plastic coated	6.0	5.2	4.0	3.6	335
71 02 200	047056	200	0	black atramentized	with slim multi-component grips	6.0	5.2	4.0	3.6	372
71 12 200	066859	200	1	black atramentized	with slim multi-component grips	6.0	5.2	4.0	3.6	375
71 31 200	042327	200	3	black atramentized	plastic coated	6.0	5.2	4.0	3.6	330
71 32 200	066880	200	3	black atramentized	with slim multi-component grips	6.0	5.2	4.0	3.6	370
71 21 200	066866	200	2	black atramentized	plastic coated	6.0	5.2	4.0	3.6	320
71 22 200	066873	200	2	black atramentized	with slim multi-component grips	6.0	5.2	4.0	3.6	375
71 41 200	066897	200	4	black atramentized	plastic coated	6.0	5.2	4.0	3.6	335