




CROWFOOT SPANNERS


3114 - DS 3114

CROWFOOT SPANNER

- ▶ Opening at right angle to shaft for maximum accessibility
- ▶ GEDORE vanadium steel 31CrV3, chrome-plated
- ▶ No. 3114 = Delivery without tommy bar
- ▶ No. DS 3114 = Delivery with tommy bar 26 D



3114

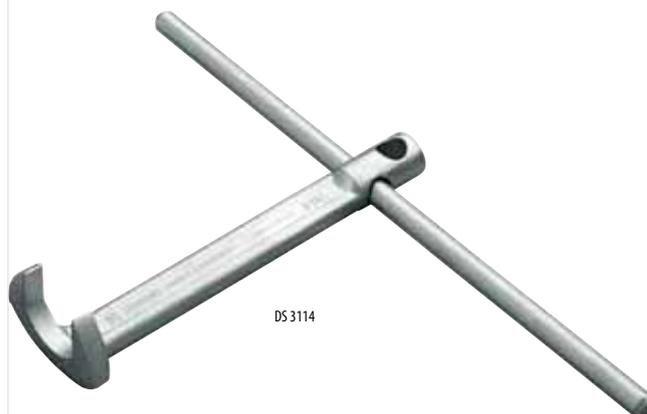

DS 3114

| Ø mm | L | a | b | d ₁ | d ₂ | 26 D | kg | Code | No. |
|------|-----|------|------|----------------|----------------|------|-------|---------|---------|
| 13 | 160 | 5.5 | 28.0 | 8.5 | 13.8 | 8 | 0.095 | 6670050 | 3114 13 |
| 14 | 160 | 5.5 | 28.0 | 8.5 | 13.8 | 8 | 0.093 | 6670130 | 3114 14 |
| 16 | 200 | 6.0 | 33.0 | 10.5 | 16.8 | 10 | 0.160 | 6676920 | 3114 16 |
| 17 | 200 | 6.0 | 33.0 | 10.5 | 16.8 | 10 | 0.169 | 6670210 | 3114 17 |
| 18 | 200 | 7.0 | 37.0 | 12.5 | 19.6 | 12 | 0.216 | 6677060 | 3114 18 |
| 19 | 200 | 7.0 | 37.0 | 12.5 | 19.6 | 12 | 0.224 | 6670480 | 3114 19 |
| 21 | 200 | 8.0 | 42.0 | 12.5 | 19.6 | 12 | 0.272 | 6677140 | 3114 21 |
| 22 | 200 | 8.0 | 42.0 | 12.5 | 19.6 | 12 | 0.265 | 6670560 | 3114 22 |
| 24 | 250 | 9.0 | 46.0 | 14.5 | 23.6 | 14 | 0.419 | 6670640 | 3114 24 |
| 27 | 250 | 10.0 | 52.0 | 14.5 | 23.6 | 14 | 0.519 | 6670720 | 3114 27 |
| 30 | 250 | 11.0 | 57.0 | 16.5 | 27.6 | 16 | 0.633 | 6670800 | 3114 30 |
| 32 | 250 | 11.8 | 61.0 | 16.5 | 27.6 | 16 | 0.712 | 6670990 | 3114 32 |
| 36 | 315 | 12.8 | 68.0 | 19.0 | 31.5 | 18 | 1.034 | 6671020 | 3114 36 |
| 41 | 315 | 14.0 | 76.0 | 19.0 | 31.0 | 18 | 1.197 | 6671100 | 3114 41 |
| 46 | 315 | 15.0 | 85.0 | 21.0 | 34.0 | 20 | 1.486 | 6671290 | 3114 46 |
| 50 | 315 | 15.0 | 92.0 | 21.0 | 34.0 | 20 | 1.674 | 6671370 | 3114 50 |

| Ø mm | L | a | b | d ₁ | d ₂ | 26 D | kg | Code | No. |
|------|-----|------|------|----------------|----------------|------|-------|---------|------------|
| 13 | 160 | 5.5 | 28.0 | 8.5 | 13.8 | 8 | 0.168 | 6672180 | DS 3114 13 |
| 14 | 160 | 5.5 | 28.0 | 8.5 | 13.8 | 8 | 0.168 | 6672260 | DS 3114 14 |
| 16 | 200 | 6.0 | 33.0 | 10.5 | 16.8 | 10 | 0.280 | 6677220 | DS 3114 16 |
| 17 | 200 | 6.0 | 33.0 | 10.5 | 16.8 | 10 | 0.286 | 6672340 | DS 3114 17 |
| 18 | 200 | 7.0 | 37.0 | 12.5 | 19.6 | 12 | 0.436 | 6677300 | DS 3114 18 |
| 19 | 200 | 7.0 | 37.0 | 12.5 | 19.6 | 12 | 0.440 | 6672420 | DS 3114 19 |
| 21 | 200 | 8.0 | 42.0 | 12.5 | 19.6 | 12 | 0.482 | 6677490 | DS 3114 21 |
| 22 | 200 | 8.0 | 42.0 | 12.5 | 19.6 | 12 | 0.486 | 6672500 | DS 3114 22 |
| 24 | 250 | 9.0 | 46.0 | 14.5 | 23.6 | 14 | 0.798 | 6672690 | DS 3114 24 |
| 27 | 250 | 10.0 | 52.0 | 14.5 | 23.6 | 14 | 0.902 | 6672770 | DS 3114 27 |
| 30 | 250 | 11.0 | 57.0 | 16.5 | 27.6 | 16 | 1.256 | 6672850 | DS 3114 30 |
| 32 | 250 | 11.8 | 61.0 | 16.5 | 27.6 | 16 | 1.324 | 6672930 | DS 3114 32 |
| 36 | 315 | 12.8 | 68.0 | 19.0 | 31.5 | 18 | 2.016 | 6673070 | DS 3114 36 |
| 41 | 315 | 14.0 | 76.0 | 19.0 | 31.0 | 18 | 2.178 | 6673150 | DS 3114 41 |
| 46 | 315 | 15.0 | 85.0 | 21.0 | 34.0 | 20 | 2.940 | 6673230 | DS 3114 46 |
| 50 | 315 | 15.0 | 92.0 | 21.0 | 34.0 | 20 | 3.204 | 6673310 | DS 3114 50 |

➔ 26 D 156



➔ 26 RS 626 S 157

